



05-09 Hood Hinge Installation

1. Mount upper brackets with #12 screws. Drill 1/16 pilot hole 2 3/4 inches forward of factory round hole in hood.

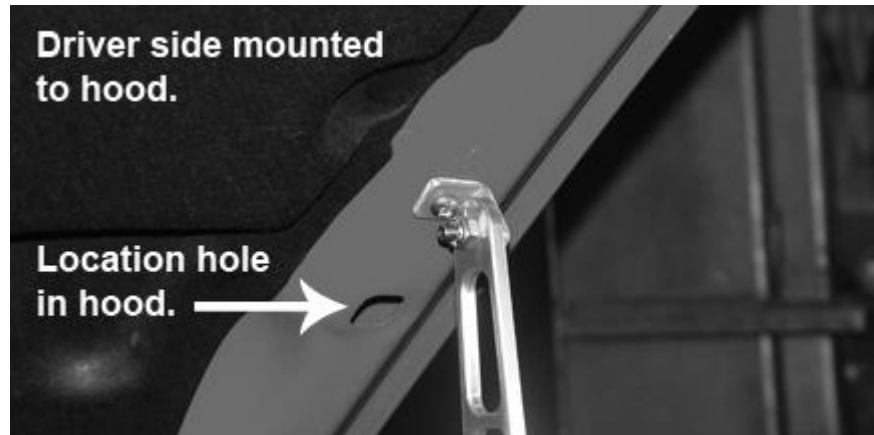

2. Mount lower brackets on inside fender ledge 1-inch forward of strut tower.

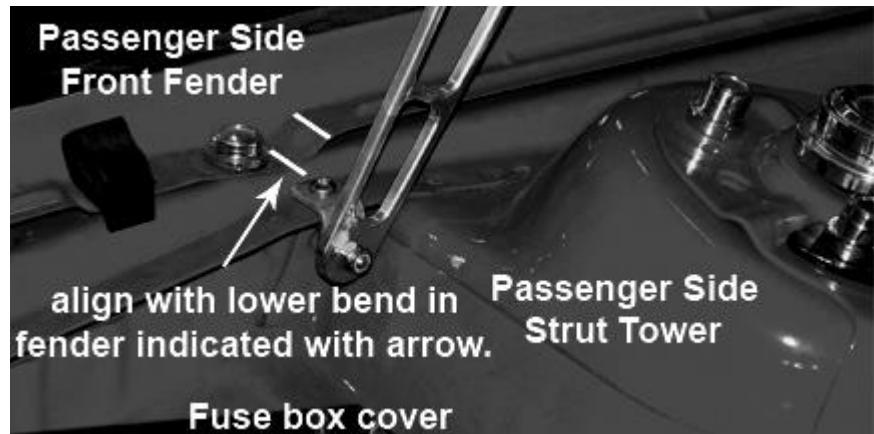

3. Mount hinge towards engine side of bracket by inserting 1/4-20 x 5/8 screw through bracket from outside. Then place nylon washer on inside. Slip hinge ends over screws against nylon washer. Hinge must close towards front of car.
4. Thread nut on and tighten until play is removed but hinge still pivots freely.