

One Piece Door Sill Installation (94-04)

NOTE: Although it is not necessary, removing the factory Edge Sill plate will provide a better fit.




1. Remove the factory Edge Sill plate by gently lifting it up.




2. Clean off any excess double sided tape left behind from the removal.



3. For a more secure fit, apply double sided tape (not included) on the outer edge of the door sill.

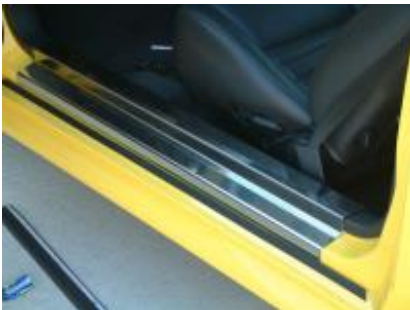

4. Center the new One Piece Sill over the existing kick panel while pressing gently.

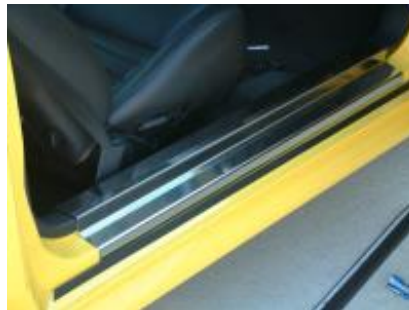

Repeat the procedure for the opposite side.