


The Halux® 50 is a global leader in exam lighting and offers a variety of mounting options. Among these is the rail mount which fits most rail systems. The Halux 50 offers high-performance and quality design.




FEATURES

- 73,000 lux (6800 fc) at 16"; 60,000 lux (5600 fc) at 18" powered by optically advanced 50-watt IRC (Infrared Coated) halogen Xenon lamp
- 3400K color temperature; 8° light beam
- A variety of mounting options: telescopic ceiling, wall, rail mount, table clamp and floorstand
- 38" arm reach on ceiling, floorstand, rail, and standard wall, table mounts; 54" reach for wall, table, and rail mounts with extension models
- The Goose-neck arm offers a 36" reach on floorstand, rail and standard wall and table mounts; 52" reach on wall, table, and rail mounts with extension models
- Includes wrap-around handle for easy positioning
- Double wall construction assures cool housing surface temperature
- 3000 hour lamp life
- Light head moves 270° for superior positioning
- Optional color correction filter to achieve greater than 4000K
- Hospital-grade plug included
- 3-year limited warranty
- 120V is standard; 230V models are available

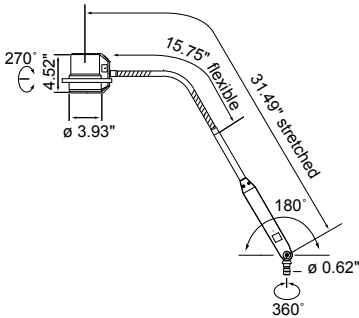

Model: SX Model Goose-neck Arm

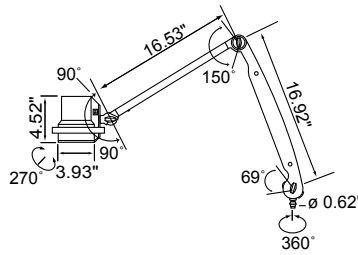

Model: FX Articulating Arm



Model: FX Articulating Arm Including Floorstand

ORDERING INFORMATION: HALUX® 50

Description	Part Numbers
FX Articulating Arm Including Table Clamp	D13-657-100
FX Articulating Arm Including Floorstand	D13-657-110
FX Articulating Arm Including Wall Mount	D13-657-120
FX Articulating Arm Including Wall Mount and Extension Arm	D13-657-130
FX Articulating Arm Including Rail Mount	D13-657-150
FX Articulating Arm Including Single Ceiling Mount	D13-657-140
SX Goose-neck Arm Including Table Clamp	D13-113-100
SX Goose-neck Arm Including Floorstand	D13-113-110
SX Goose-neck Arm Including Wall Mount	D13-113-120
SX Goose-neck Arm Including Wall Mount and Extension Arm	D13-113-130
SX Goose-neck Arm Including Rail Mount	D13-113-150
Accessories	
Set of Four Halux® 50W Replacement Lamps	D68-727-000