

TANEO

LED LUMINAIRE

FEATURES:

- Power consumption 15W, 31W or 47W
- 4000K or 5000K color temperature available
- Glare-free - clear or translucent acrylic prismatic lens
- Dimming capability 100% to 10% of total light output
- Anodized aluminum housing
- Spring-balanced arm with 3D head joint
- Touch panel integrated in the luminaire head for on/off and dimming
- Wall power supply (15W) or table power supply (31W and 47W)
- 100–240V, 50/60Hz
- 10' cord with US plug included
- ETL/cETL approved


SPECIFICATIONS:

Voltage	100-240V, 50/60Hz
Lamping	LED
Controls	touch panel w/ switch on head
Color Temperature	4000K or 5000K
Color Rendering Index (CRI)	80
Luminaire Head Material	anodized aluminum
Arm Material	aluminum
Lens Material	polycarbonate
Head Dimension	8.6", 15.7" or 22.7"
Arm Reach	40" reach (arm version)
Power Consumption	15W, 31W or 47W
Protection Rating	IP20
Certification	ETL/cETL approved CE marked
Cord/Plug	11' power cord w/ plug
Mounting and accessories	See page 71




TANEO is a sophisticated LED lighting solution designed to provide premium performance for a myriad of task lighting applications. With three available light output levels, as well as options for lenses, color rendering and the type of mounting that will work best, TANEO can properly fulfill every luminance requirement.

TANEO is energy-efficient, consuming 30% less energy when compared to conventional task luminaires with the same luminous power. High lighting quality and ergonomic handling make TANEO ideal for manufacturing, assembly or quality control procedures, as well as laboratory, electronic or metalworking environments.



DIMENSIONAL DATA

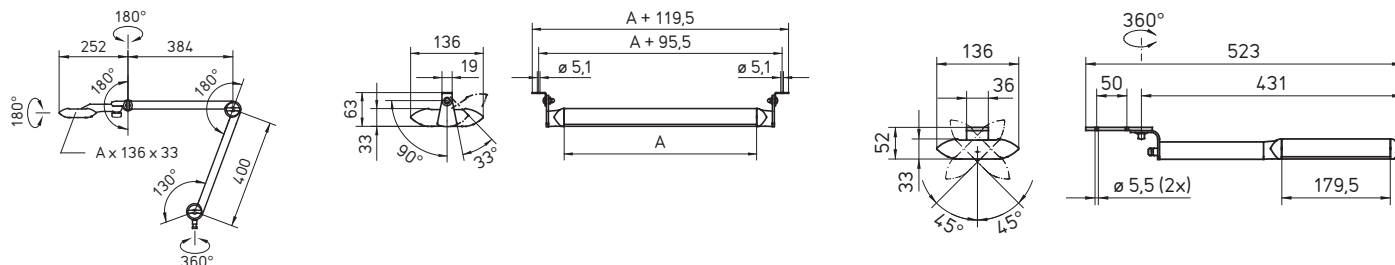

Measurements in millimeters

ORDERING INFORMATION

Version	Wattage	Color Temp.	Lens	Dimension (A)	Lumens	Model	Part #
Articulated arm	15W	4000K	Clear prismatic	8.6" (218mm)	650	STZL 12 R	112 576 000 - 005 620 55
Articulated arm	15W	5000K	Clear prismatic	8.6" (218mm)	650	STZL 12 R	112 576 000 - 005 620 45
Articulated arm	15W	4000K	Translucent	8.6" (218mm)	600	STZL 12 R	112 576 000 - 005 620 95
Articulated arm	15W	5000K	Translucent	8.6" (218mm)	600	STZL 12 R	112 576 000 - 005 621 04
Articulated arm	31W	4000K	Clear prismatic	15.7" (398mm)	1300	STZL 24 R	112 577 000 - 005 621 30
Articulated arm	31W	5000K	Clear prismatic	15.7" (398mm)	1300	STZL 24 R	112 577 000 - 005 621 41
Articulated arm	31W	4000K	Translucent	15.7" (398mm)	1200	STZL 24 R	112 577 000 - 005 621 57
Articulated arm	31W	5000K	Translucent	15.7" (398mm)	1200	STZL 24 R	112 577 000 - 005 621 77
Articulated arm	47W	4000K	Clear prismatic	22.7" (577mm)	1950	STZL 36 R	112 578 000 - 005 621 92
Articulated arm	47W	5000K	Clear prismatic	22.7" (577mm)	1950	STZL 36 R	112 578 000 - 005 622 07
Articulated arm	47W	4000K	Translucent	22.7" (577mm)	1800	STZL 36 R	112 578 000 - 005 622 19
Articulated arm	47W	5000K	Translucent	22.7" (577mm)	1800	STZL 36 R	112 578 000 - 005 622 28
Mounted swivel arm	15W	4000K	Clear prismatic	8.6" (218mm)	650	SARKL 12 R	112 991 000 - 005 624 01
Mounted swivel arm	15W	5000K	Clear prismatic	8.6" (218mm)	650	SARKL 12 R	112 991 000 - 005 624 64
Mounted swivel arm	15W	4000K	Translucent	8.6" (218mm)	600	SARKL 12 R	112 991 000 - 005 624 76
Mounted swivel arm	15W	5000K	Translucent	8.6" (218mm)	600	SARKL 12 R	112 991 000 - 005 624 86
Fixed mount with rotation	31W	4000K	Clear prismatic	15.7" (398mm)	1300	SARL 24 R	112 992 000 - 005 624 95
Fixed mount with rotation	31W	5000K	Clear prismatic	15.7" (398mm)	1300	SARL 24 R	112 992 000 - 005 625 10
Fixed mount with rotation	31W	4000K	Translucent	15.7" (398mm)	1200	SARL 24 R	112 992 000 - 005 625 22
Fixed mount with rotation	31W	5000K	Translucent	15.7" (398mm)	1200	SARL 24 R	112 992 000 - 005 625 43
Fixed mount with rotation	47W	4000K	Clear prismatic	22.7" (577mm)	1950	SARL 36 R	112 993 000 - 005 625 56
Fixed mount with rotation	47W	5000K	Clear prismatic	22.7" (577mm)	1950	SARL 36 R	112 993 000 - 005 625 67
Fixed mount with rotation	47W	4000K	Translucent	22.7" (577mm)	1800	SARL 36 R	112 993 000 - 005 625 89
Fixed mount with rotation	47W	5000K	Translucent	22.7" (577mm)	1800	SARL 36 R	112 993 000 - 005 625 98

Mounting Options

Item

Dimensions

Part

Table clamp w/ pin mount (included)

0 x 3.5" span

191 025 069 40

Wall bracket

3" x 3"

226 108 019 - 006 107 54

1/2" Pin mount adapter

1.77" length

US0 209 022

1/2" Pin mount adapter

3.75" length

US0 209 012

Accessories

Item

Strength

Size

Part

Add-x magnifier

3.5 diopters (1.88X)

5" diameter

190 207 019 - 005 759 00