


UV GUARD® ADVANCE Clear Wood Finish

UV GUARD ADVANCE Clear Wood Finish is a water-based, environmentally friendly, crystal clear coating that will add depth and a modest sheen to your stained wood. UV GUARD ADVANCE Clear Wood Finish forms a breathable film yet repels moisture allowing your stain greater color retention and increased protection from harmful UV rays. There is no better choice to help protect your stained wood while simplifying the maintenance of your exterior finish.

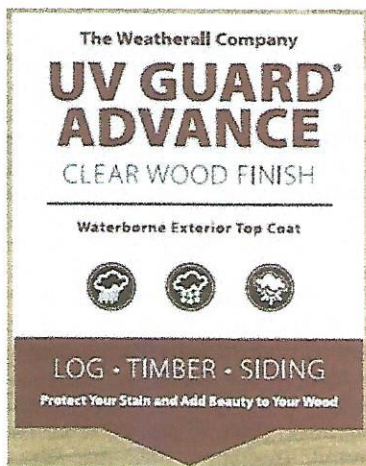

www.Weatherall.com

Manufacturing Facility:
106 Industrial Way
Charlestown, IN 47111

Distribution Centers:
Colorado: 877-275-2739
Indiana: 800-367-7068

Fax: 812-256-2344

USES

UV GUARD ADVANCE Clear Wood Finish was designed to be used as the topcoat for the UV GUARD Wood Finish stain systems but can be applied over most other water-based stains. UV GUARD ADVANCE Clear Wood Finish is easy to apply and will not darken your existing stain after each application. It can be used on logs, timber or wood siding. Best results on vertical surfaces.

Do not use on high density, high oil content or exotic woods.

ADVANTAGES

- **Crystal Clear Finish**
- **Long Term Stain Protection**
- **Adds Depth to Your Wood**
- **Quick Drying Formula**
- **Easy Maintenance**
- **Modest or Natural Looking Sheen**
- **Repels Moisture** while allowing the wood to breathe naturally.
- **Eco-Friendly**
- **Low VOC Formula**
- **Soap & Water Clean-Up**
- **Virtually No Odor**
- **Mold and Mildew Protection.** Contains an effective biocide that resists decay and deterioration caused by mold and mildew.
- **Compatible** with Most Other Water Based Finishing Products
- **Easily Applied** by brush, airless or pump style garden sprayer.
- **Large Coverage Rates**
- **All Purpose Protection** for Logs, Siding or Timbers
- **Provides Excellent Adhesive Surface** for chinking and virtually eliminates all debonding problems that are likely to occur.
- **Convenient Sizes-** 1 and 5 gallon pails

TECHNICAL INFORMATION

UV GUARD ADVANCE Clear Wood Finish is only available as a modest sheen.

Physical Properties

Viscosity	150 cps
Density	8.5 +/- 0.1 lbs./gal.
pH	8 +/- 0.5
VOC	Less than 100 g/l
% Solids	20%
Odor	Odorless when dry
Toxicity	Non-toxic/safe for interior
Shelf Life	2 years
Stability	Salt spray stable
Test Method	ASTM G-53

Coverage Rates

1st Coat: 200-400 sq. ft. per gallon
2nd Coat: 400-500 sq. ft. per gallon

**The above coverage rates are highly dependent upon the condition of the existing stain. Do not thin or dilute product.

Dry Time

UV GUARD ADVANCE Clear Wood Finish will be dry to the touch in 30 minutes to 1 hour and completely dry in 24 to 48 hours depending on temperature and relative humidity.

Packaging

UV GUARD ADVANCE Clear Wood Finish is available in 5 gallon and 1 gallon pails.

Storage

Store UV GUARD ADVANCE Clear Wood Finish in a tightly sealed container in moderate temperatures (between 40° F. & 90° F.) **Do not freeze.**

Clean Up

Clean up immediately with soap and water. Dried brushes will require cleaning with lacquer thinner. Spray equipment should be cleaned immediately per the equipment manufacturer's recommendations for latex finishes. Dispose of excess materials and UV GUARD ADVANCE Clear Wood Finish by following all local, state and federal environmental disposal regulations.

WHY IT WORKS?

UV GUARD ADVANCE Clear Wood Finish is a blend of the most environmentally advanced acrylics, UV blockers and stabilizers. This formula makes UV GUARD ADVANCE Clear Wood Finish ideal for protecting your exterior stained wood because it provides outstanding water resistance, long term stain protection and mildew resistance.