



RoHS COMPLIANT

DATE	REV.	REVISION	DRAFTING	CHECKED
	A/0			

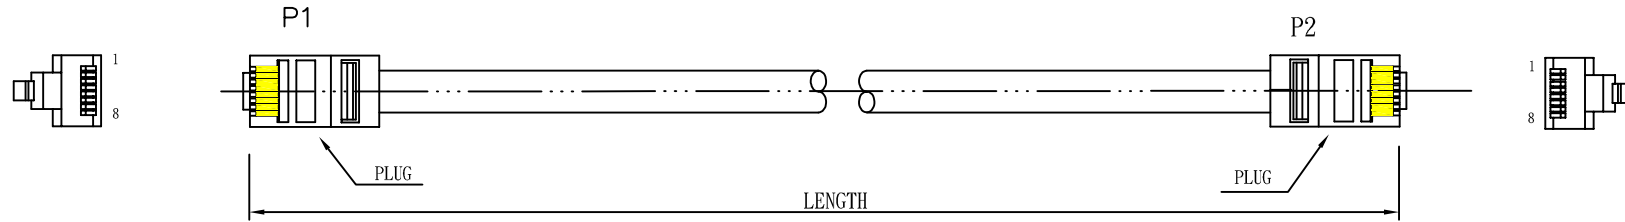

Marking: YFC CAT.6 UTP ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2-1 ETL/3P VERIFIED ▲ 24AWGX4P (LP992) PATCH TYPE CMX(UL) C(UL) CMH E164469-XX

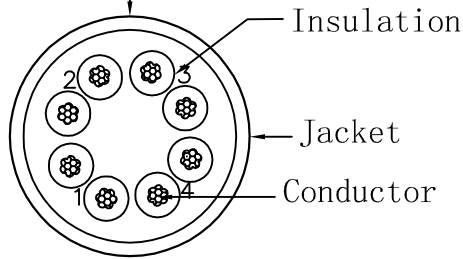

orange 2	green 3
white/orange	white/green
blue 1	brown 4
white/blue	white/brown

Conductor	Bare Copper 24AWG 7/0.18±0.008
Insulation	Diameter: 0.93±0.06mm
Jacket	PVC Thickness: MIN at any point: 0.60mm MAX AVG: 0.70mm Diameter: 5.8±0.15mm

Wire	CAT. 6 UTP STR 24AWG*4P
Plug	Assemble 8P8C 50U"
xx=Length	1FT 2FT 3FT 4FT 5FT 6FT 7FT 10FT 15FT 20FT 25FT 30FT 50FT 100FT
yy=Color	BK012 BU608 GN509 GY177 OR307 PU720 RD210 WH928 YE406 RD220

PA/R	PINOUT		
	P1 (T568B)	WIRE	P2 (T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Unless specified on the drawing, tolerances are per the follows:

.	± 1
.X	± 0.2
.XX	± 0.05

3RD	
-----	--

DRAW.NO	L-155	ITEM	1001xxyy		
DEPARTMENT	technology	DRAW	wuxiao	DATE	2011/07/01
SCALE		CHECKER	APPROVAL		
UNIT	MM	SHEET	1	OF	1