
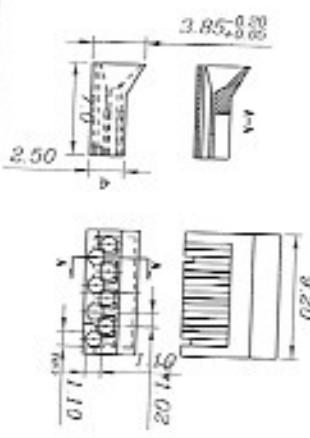



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

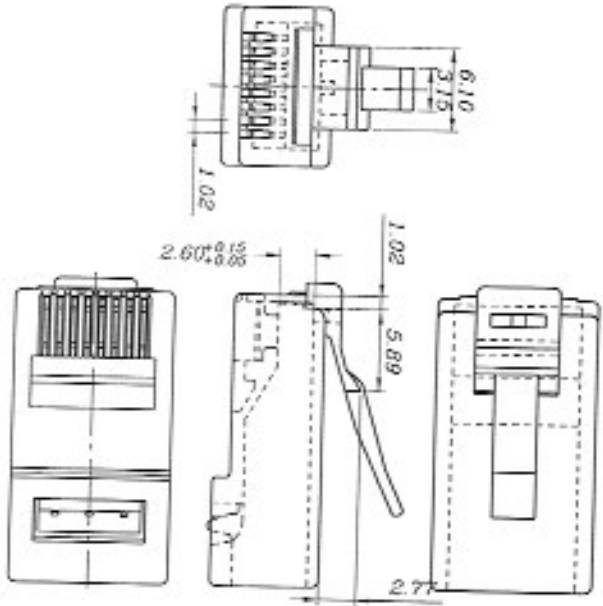

PERFORMANCE:  
 1. ELECTRICAL:  
 I.E. APPLICATIONS: 200 VOLT AC MAX. AT 240000  
 DIELECTRIC WITHSTANDING VOLTAGE: 200 VOLTS AC  
 INSULATION RESISTANCE: 100 MΩ  
 TEMPERATURE RESISTANCE: 200 °C MAX. AFTER  
 ENVIRONMENTAL TESTING  
 2. MECHANICAL:  
 COMPLIANT WITH TENSILE STRENGTH: 1000000 N  
 DURABILITY: 200 HOURS CYCLES  
 MATERIAL & FINISH:  
 REINFORCED POLYIMIDE/STAINLESS STEEL/COIL (S.S.316)  
 CONTACT: TRANSPARENT OR OTHER COLOR AVAILABLE  
 CONTACT BLEND: COPPER ALLOY  
 CONDUCTOR: GOLD WIRE, 24AWG, 24 AWG,  
 (It can be used for the wire of board 1.6mm (0.063")  
 GOLD RATING: 100% (100% AVAILABLE)

Issued  
 2014.04.24  
 R&D

BACK:	E	Y	Z	A	AL	ZL	AB
Drawing							
Mark							
GOLD PLATING	3μm	3μm	6μm	150μm	300μm	500μm	FLAT
Mark					CASE TYPE Mark	ROUND	FLAT

1 2 3

REV	DATE	MODIFICATION	DRAWN