



# DOSATRON®

WATER POWERED DOSING TECHNOLOGY


## 100 GPM: D20S

### Product Specifications

<b>Dilution Range:</b>	1:500 to 1:50 (.2% to 2%)
<b>Water Flow Range:</b>	5 to 100 GPM
<b>Operating Pressure Range:</b>	2 to 120 PSI
<b>Available Housing Materials:</b>	Aluminum (Standard Blue)
<b>Dimensions:</b>	55" x 15" (with legs); 42" x 15" (no legs)
<b>Weight:</b>	47 lbs
<b>Connection Size:</b>	2" NPT
<b>Maximum Temperature:</b>	104° F
<b>Included Accessories:</b>	Set of legs, manual bypass, 6 ft clear suction tube, strainer, vacuum breaker and operating manual
<b>Recommended Accessories:</b>	200 mesh filter, check valve.



## Basic Installation

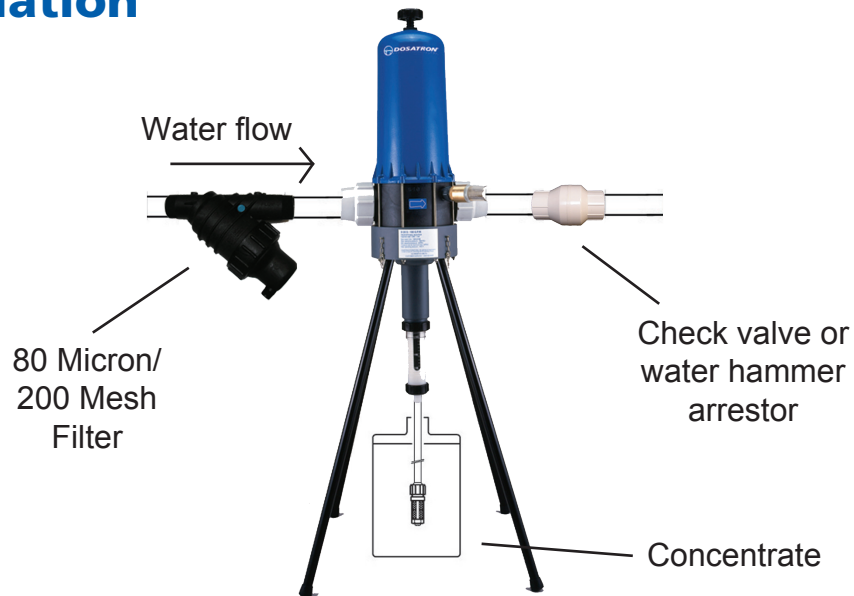

**Dosatron International**  
**2090 Sunnydale Blvd. • Clearwater, FL, USA**  
**800-523-8499 • [www.dosatronusa.com](http://www.dosatronusa.com)**

Dosatron International, Inc. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards by Dosatron International S.A.S., part of United Technologies Corporation, U.S.A.