



DOSATRON®

WATER POWERED DOSING TECHNOLOGY

20 GPM: D45RE15


Product Specifications

Dilution Range:	1:500 to 1:66 (.2% to 1.5%)
Water Flow Range:	.4 to 20 GPM
Operating Pressure Range:	7 to 70 PSI
Available Housing Materials:	<ul style="list-style-type: none">• Polyacetal (Standard Blue)• PVDF (White)
Other Options:	Side-inject
Dimensions:	24" x 7 1/2"
Weight:	8 lbs
Connection Size:	1" NPT
Maximum Temperature:	104° F
Included Accessories:	6 ft clear suction tube, strainer, weight, mounting bracket and operating manual
Recommended Accessories:	200 mesh filter, check valve, pressure regulator, flow restrictor.



Recommended Installation

IPK100 - 20 GPM Industrial Plumbing Kit

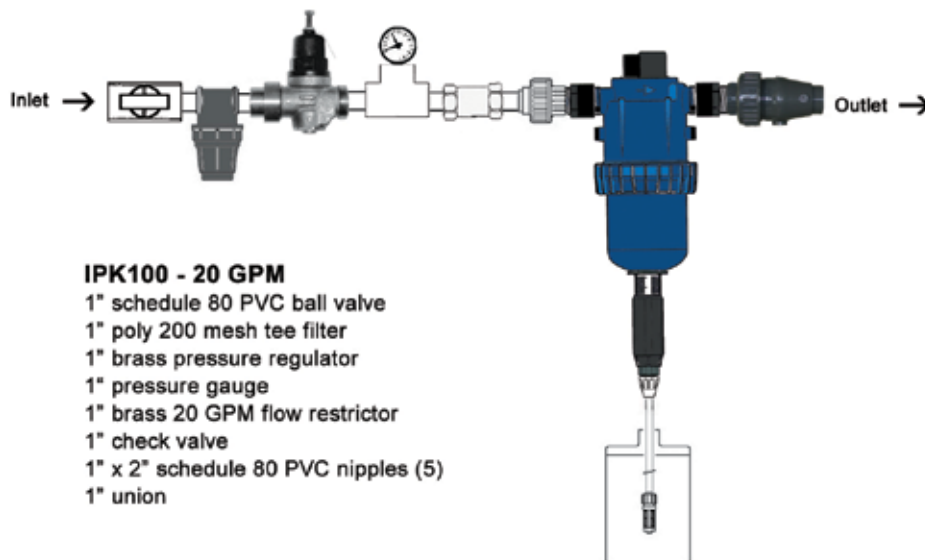

IPK100 - 20 GPM

- 1" schedule 80 PVC ball valve
- 1" poly 200 mesh tee filter
- 1" brass pressure regulator
- 1" pressure gauge
- 1" brass 20 GPM flow restrictor
- 1" check valve
- 1" x 2" schedule 80 PVC nipples (5)
- 1" union

Dosatron International
2090 Sunnydale Blvd. • Clearwater, FL, USA
800-523-8499 • www.dosatronusa.com