

# NAPOLEON®

WOOD BURNING

WOOD BURNING STOVES & INSERTS



[napoleonfireplaces.com](http://napoleonfireplaces.com)



## Innovative features for incomparable heating quality.

1600C - Wood Burning Stove .....	4 - 5
1400C & 1100C - Wood Burning Stoves .....	6 - 7
1150P - Wood Gourmet™ Cookstove .....	8 - 9
1450 - Independence™ Wood Burning Stove .....	10 - 11
1100, 1400 & 1900 - Wood Burning Stoves .....	12 - 13
1100PL & 1400PL - Wood Burning Stoves .....	14 - 15
1101 - Wood Burning Insert .....	16 - 17
1402 - Wood Burning Insert .....	18 - 19
Outstanding Features of Napoleon's Advanced Technology .....	20
Napoleon's EPA Technology .....	21
Options, Features & Accessories .....	22 - 23
Detailed Specifications .....	24 - 27



1101 shown with standard black flashing, satin chrome plated door and matching spring door handle




## Why a Napoleon® Wood Burning Stove or Insert?

The answer is quite simple. No other hearth manufacturer in North America has perfected wood burning technology to the level that Napoleon® has... perfecting true craftsmanship to last a lifetime. Years of research, strict quality testing and advanced wood burning technology have surpassed critical standards, providing you with the cleanest, most efficient wood burning products. Napoleon® products are backed by the President's Limited Lifetime Warranty, guaranteed to give you the solid performance you deserve.

**Best Burn Times In The Industry...** Napoleon® wood burning products offer state-of-the-art technology, unlike any others, completely utilizing the firebox chamber with a fully lined refractory system. The kiln-like firebox chamber allows for an amazing long day or overnight burn. The single lever combustion control allows for simple regulation of the burn rate.

**No Power? No Problem!...** We all feel vulnerable when there is a power outage, but with a Napoleon® wood burning fireplace, stove or insert, you can rely on comfort and heat when you need it most. Rest assured, you can enjoy a cozy, warm atmosphere when the power is out!

**Warming Homes, Not The Environment...** Napoleon® products are designed not only for outstanding heating efficiencies but Napoleon® also takes great pride in their commitment to provide environmentally friendly wood burning products. Napoleon's wood burning technology exceeds EPA (Environmental Protection Agency) standards burning very clean with low emissions, helping to make a difference in keeping our environment safe.



# 1600C - Cast Iron Stove

Heating up to 1,500 sq. ft.

Fine, solid European cast iron design and Napoleon's advanced wood burning technology transform small amounts of wood into large amounts of cozy heat, easily sustaining overnight burns. The EPA certified 1600C is available in porcelain enamel Majolica brown or painted metallic black finishes. The 1600C features elegantly arched Early American double doors that open fully, almost flush to the sides with concealed hinges and is convertible from top to rear vent for easy loading and installation flexibility. A beautiful investment for any room!

1600C

Up to 52,000 BTU's

27" w x 28" h x 24" d

EPA Certified

For more detailed specifications on this unit, see page 24

## Options & Accessories



Available in Majolica brown and painted metallic black finishes



Black Screen Kit



Removable Ash Drawer (standard)



Napoleon® Insignia (standard)



Variable Speed Blower





1600C shown in porcelain enamel Majolica brown finish



# 1400C & 1100C - Cast Iron Stoves

Heating up to 2,000 sq. ft.

Napoleon's cast iron stoves feature advanced wood burning technology that provides you with the cleanest, most efficient heating experience. They also feature a design that boasts a European style, a decorative door with ceramic glass and a large view of the fire. Built with confidence to last with fully welded seams and using the highest quality materials; all covered under Napoleon® President's Limited Lifetime Warranty. The 1100C or 1400C are the perfect wood burning stoves for those wanting a reliable heating source year after year.

## 1400C

Up to 70,000 BTU's

28"w x 28 ½"h x 27"d

EPA Certified

## 1100C

Up to 55,000 BTU's

28"w x 28 ½"h x 22 ½"d

EPA Certified

For more detailed specifications on these units, see page 24

## Options & Accessories



Available in Majolica brown and painted metallic black finishes



Lift Top Lid  
Available on 1400C



Variable Speed Blower



Ash Pan  
(standard)



1100C shown in porcelain enamel Majolica brown finish





1400C shown in painted metallic black finish



# 1150P - Wood Gourmet™ Cookstove

Heating up to 1,600 sq. ft.

This unique, functional, EPA certified wood burning stove produces lots of warm, comfortable heat with the added benefit of a reliable cook top surface. Removable hot plates with designated "hot zones" and functional "pot fenders" to keep cookware safely on the surface come standard. With up to 55,000 BTU's, high burn output, large firebox capacity, convenient wood storage compartment and the reliability of a combined heating and cooking source, it's the perfect addition to your home, cottage or both!

1150P

Up to 55,000 BTU's

29 3/8" w x 26 1/2" h x 23 3/16" d

EPA Certified

For more detailed specifications on this unit, see page 25

## Options & Accessories



Webbed Arched Doors  
Two Colour Options\*



Arched Doors  
Two Colour Options\*



Variable Speed Blower



Convenient Ash Pan  
(standard)



Wood Storage Compartment  
(standard)



Reliable Cook Top Surface  
(standard)



Pot Fenders Keep Food  
Safely on the Surface  
(standard)







1150P shown with satin chrome plated webbed arched door



# 1450 - Independence™ Wood Stove

Heating up to 2,000 sq. ft.

Napoleon® is proud to offer the world renowned quality of their clean burning wood technology at an economical price that's easy on your budget. The 1450 Independence™ EPA wood burning stove provides the best value for your money - the same clean burning and efficient Napoleon® EPA technology, reliability and performance but in a "dressed down" version, yet includes pedestal base and metallic black cast iron door ready for installation! The non-catalytic high tech design eliminates the need for a delicate ceramic catalytic combustor, which can deteriorate over time. Take control of your independence from the utility companies and save money heating your home!

1450

Up to 70,000 BTU's

25 ½"w x 33 ¼"h x 27"d

EPA Certified

For more detailed specifications on this unit, see page 25

## Options & Accessories



Convenient Single Lever  
Burn Control  
(standard)



Variable Speed Blower





Vortex Series

1450 Independence™ shown with standard painted metallic black cast iron door



# 1100, 1400 & 1900 - Deluxe EPA Wood Stoves

Heating 1,600 - 3,500 sq. ft.

Napoleon's deluxe pedestal EPA wood stoves feature a solid, dynamic appearance with performance to match. The pedestal models are designed to provide you with outstanding heat efficiencies while achieving low emissions. These deluxe pedestal stoves come standard with painted metallic black louvres, painted metallic black trivet and an ash pan with a lid. Optional cast iron arched or webbed arched doors, louvres and trivets are available in a variety of finishes to match any room in your home.

1100	1400	1900
Up to 55,000 BTU's	Up to 70,000 BTU's	Up to 85,000 BTU's
25 ½"w x 33 ¼"h x 22 ½"d	25 ½"w x 33 ¼"h x 27"d	25 ½"w x 33 ¼"h x 31 ½"d
EPA Certified	EPA Certified	EPA Certified

For more detailed specifications on these units, see pages 25 & 26

## Options & Accessories



Finishes  
Available in painted metallic black  
and porcelain black finishes



Webbed Arched Doors  
Three Colour Options\*




Arched Doors  
Three Colour Options\*



Spring Door Handle  
Three Colour Options\*



Upper Louvres  
Three Colour Options\*



Trivets  
Two Colour Options\*



COOKMATE  
Available for 1400 & 1900



Variable Speed Blower



Ash Drawer  
(standard)





1100 shown with painted metallic black webbed arched door



1400 shown with painted metallic black arched door



1900 shown with painted metallic black webbed arched door



# 1100PL & 1400PL - Deluxe EPA Wood Stoves

Heating 1,600 - 2,000 sq. ft.

These highly efficient leg model stoves, not only look great, they provide lots of reliable heat that can easily be adjusted by the single lever burn control. Napoleon's airwash technology combined with high temperatures keep the viewing glass clean so you can always enjoy the beautiful wood burning flames. With decorative accessories available you can customize your stove to complement your own personal style.

## 1100PL

Up to 55,000 BTU's

25 1/2"w x 32"h x 22 1/2"d

EPA Certified

## 1400PL

Up to 70,000 BTU's

25 1/2"w x 32"h x 27"d

EPA Certified

For more detailed specifications on these units, see pages 26 & 27

## Options & Accessories



Webbed Arched Doors  
Three Colour Options\*



Arched Doors  
Three Colour Options\*



Spring Door Handle  
Three Colour Options\*



Leg Options  
Three Colour Options\*



Ash Drawer Kit





1100PL shown with satin chrome plated webbed arched door, legs and spring door handle



1400PL shown with painted metallic black arched door, legs and spring door handle



# 1101 - Wood Burning Insert

Heating up to 1,600 sq. ft.

The 1101 wood burning insert won a prestigious industry award for its unique design, which allows for flush mount or hearth mount installation, in either a masonry or factory built fireplace. Featuring an elegantly designed, full view single door, standard WHISPER QUIET™ heat circulating blower & thermostatic sensor, this innovative design transforms small amounts of wood into large amounts of cozy heat. Customize your 1101 insert with an optional cast iron surround kit that will enhance your décor, available in porcelain enamel Majolica brown or painted black finishes.

1101

Up to 55,000 BTU's

44 ½" w x 31 ¼" h as shown

EPA Certified

For more detailed specifications on these units, see page 27

## Options & Accessories



Webbed Arched Doors  
Three Colour Options\*




Arched Doors  
Three Colour Options\*



Spring Door Handle  
Three Colour Options\*



Cast Iron Surrounds  
Two Colour Options\*



Standard Flashing Complete  
with Black Trim\*\*







1101 shown with standard black flashing, satin chrome plated arched door and matching spring door handle



# 1402 - Wood Burning Insert

Heating up to 2,000 sq. ft.

What do you do with your existing inefficient masonry fireplace? Retrofit with an efficient Napoleon® wood burning insert! Through easy operation, you achieve clean burning fires, radiating luxurious heat with a minimal amount of work and wood. Designed to be the perfect fit, this stylish insert will bring you years of satisfaction and of course... the beauty of a natural roaring fire with incomparable efficiencies! The deluxe 1402 wood burning insert comes complete with surround and trim, plus two powerful heat circulating 200 CFM blowers.

1402

Up to 70,000 BTU's

44 1/2" w x 31 1/4" h as shown

EPA Certified

For more detailed specifications on these units, see page 27

## Options & Accessories



Finishes  
Available in painted metallic black and porcelain black finishes



Spring Door Handle  
Three Colour Options\*



Cast Iron Surrounds  
Two Colour Options\*



Standard Flashing Complete  
with Black Trim\*\*



Webbed Arched Doors  
Three Colour Options\*



Arched Doors  
Three Colour Options\*



1402 shown in painted metallic black finish






1402 shown with standard black flashing, painted metallic black door and matching spring door handle



# Outstanding Features

of Napoleon's Advanced Technology

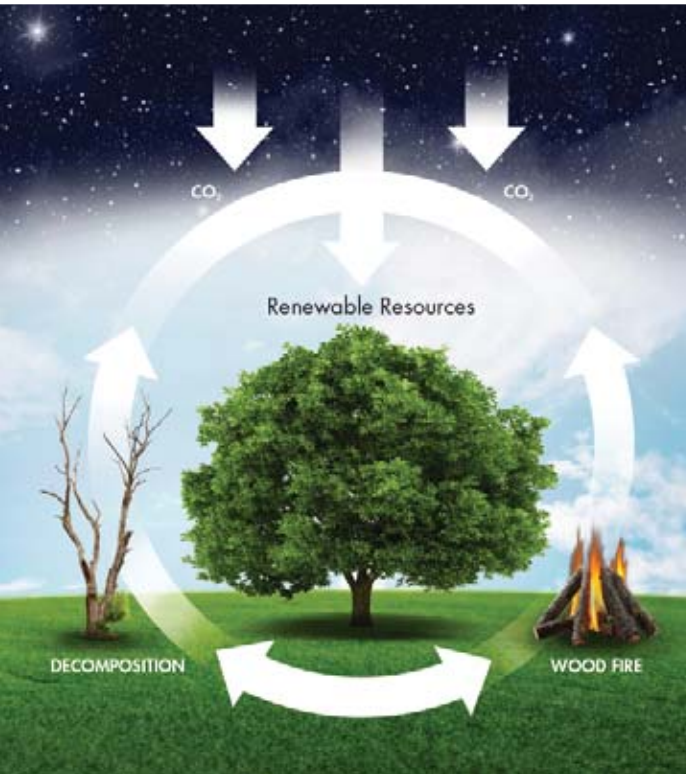

## Help Protect The Environment With A Napoleon® Wood Burning Stove or Insert

Heating your home with a Napoleon® high efficiency, EPA (Environmental Protection Agency) approved fireplace, stove or insert releases no more carbon dioxide than a dying tree would lying on the forest floor. In fact, when the entire carbon cycle is considered, a Napoleon® EPA approved fireplace heats your home more efficiently and with less impact on the environment than any other heating fuel option.

## Dual Vortex® Action

To achieve an extraordinary clean burn without a catalytic combustor, horizontal jets of super heated secondary air are mixed with the fire's smoke to burn off released smoke particles. You can actually watch the spirals of secondary air flames just below the top during most of the burn.

## Vortex® Baffle - Lifetime Warranty\*

Manufactured from high density material, Napoleon's exclusive Vortex® baffles provide an unprecedented level of durability while ensuring complete combustion resulting in a clean burning, environmentally friendly wood burning stove.

\*See dealer for details

## Secondary Air Tube - Kiln Construction

Napoleon's secondary air tube is insulated with ceramic fibre and protected with a stainless steel cover plate, ensuring complete combustion. This fully lined refractory firebox acts as a kiln, concentrating the maximum amount of heat to efficiently heat your home.



## WHISPER QUIET® Blower System

The extreme heat resistant "H" class bearings featured in Napoleon's superior heat circulating blower, creates a lasting "whole home" comfort with adjustable high & low speeds.

# Napoleon's EPA Technology

Outperforms your expectations

1. Economical 6" flue on even the largest models, assures you of efficiency and cost saving installations
2. Primary "bottom air feed" assists in cold start ups and to revive a small, dying fire
3. Secondary air tube insulated for complete combustion
4. Wrap around side shields add a delicate balance of elegance and functional practicality helping to disperse heat evenly and reduce clearances to combustibles
5. Large viewing area through an elegantly arched cast iron door
6. High heat ceramic glass provides a safe, unobstructed view of the fire
7. Effective airwash in combination with high temperatures keeps the viewing glass clean
8. Fully refractory lined firebox, similar to a kiln maintains the interior temperatures necessary to achieve low emissions
9. Ash dump with self-closing door is readily accessible (pedestal & cast iron models)
10. Large "king size" functional ash pan (600 cubic inch capacity) with two carrying handles lets you conveniently dispose of ashes (standard with pedestal and optional for leg models)
11. Folding ash pan lid allows for clean, no-mess ash removal (pedestal models)
12. Cool room air is circulated around the firebox, heated and returned to the room
13. The single lever burn control regulates primary and secondary air establishing a perfect mix and a clean burn

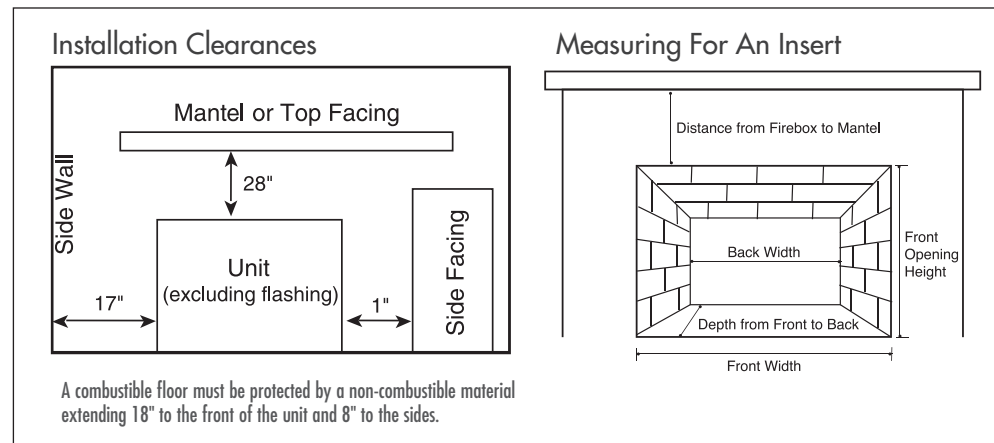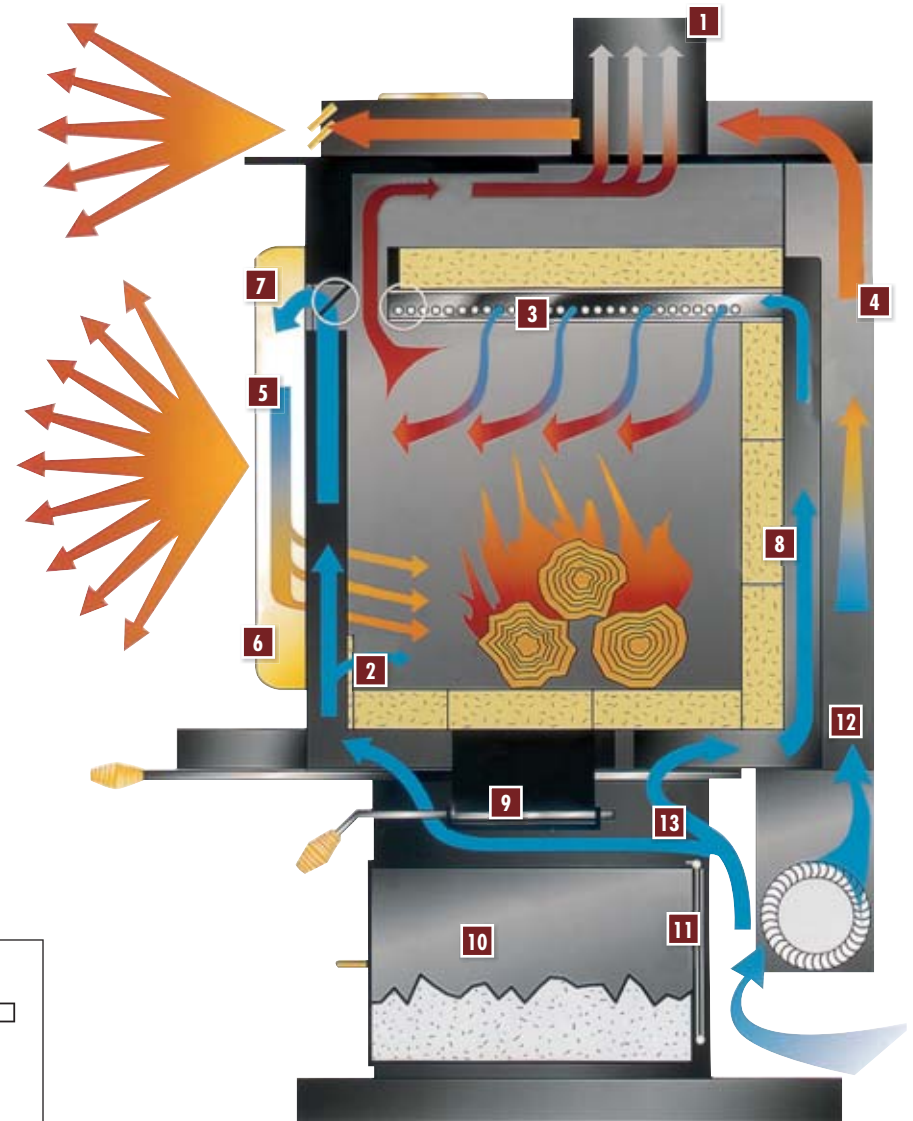

*Napoleon's EPA Wood Burning Technology... more heat with less fuel. Emissions as low as 2.8 grams per hour and 69.8% overall maximum heating efficiency.*

## Door Options



Webbed Arched  
Painted Metallic Black Finish

Webbed Arched  
24 Karat Gold Plated Finish

Webbed Arched  
Satin Chrome Plated Finish



Arched  
Painted Metallic Black Finish

Arched  
24 Karat Gold Plated Finish

Arched  
Satin Chrome Plated Finish

## Louvre Options



Painted Metallic Black Finish (standard)

24 Karat Gold Plated Finish

Satin Chrome Plated Finish

## Trivets



Painted Black Finish  
(standard)

24 Karat Gold  
Plated Finish

Satin Chrome  
Plated Finish

## Leg Options

Legs available in traditional painted black steel or elegant cast iron in 24 Karat gold plated, satin chrome plated or painted metallic black finishes.



## Lift Top Lid

Cast iron hinged lid conveniently lifts up to allow pots or kettles to rest directly on the hot surface of the actual stove top. Perfect for power failures. (1400C only)



## Outside Air Kit Option

Wood burning appliances need air to burn and often compete with other appliances in the home. The outside air kit helps balance indoor air pressure by ensuring sufficient combustion air is fed directly to the wood burning stove.

## Finish Options



Painted Metallic  
Black Finish

Porcelain Enamel  
Majolica Brown Finish

Porcelain  
Black Finish



Painted Black Finish

## Cast Iron Surrounds (1101 & 1402)

Napoleon's porcelain enamel cast iron surround kits are available for the 1101 and 1402 inserts. Create a distinct elegance with either of the two colours.



Porcelain Enamel Majolica Brown Finish



## COOKMATE™

The unique grid pattern moulded into the cast aluminum captures and retains the maximum amount of heat and transfers it directly to your frying pan or pot. The COOKMATE simply replaces your existing trivet.



## Spring Door Handles

Spring door handles are available in 24 Karat gold plated, satin chrome plated or painted metallic black finishes.

## Ash Drawer Kit Option

Optional for the leg models, 1100PL and 1400PL allows you to dispose of ashes quickly and easily.



## Napoleon® Insignia

Beautiful Napoleon® insignia ensures Napoleon quality is cast into every stove. (1600C only)



## Heat Circulating Blower

When you want to extract the maximum amount of heat, an optional heat circulating variable speed blower offers increased heating efficiency. An optional sensor control automatically turns the blower on and off. With 1101 and 1402 inserts models, WHISPER QUIET heat circulating blowers with automatic thermidisc and variable speed control are standard with the units.

## Wood Stoves



1100P



1100PL



1400P



1400PL



1900P



1450



1150P Cookstove

## Cast Iron Wood Stoves



1100C



1400C



1600C

## Wood Inserts



1101




1402

	1600C	1400C	1100C	1150P	1450	1100	1400	1900	1100PL	1400PL	1101	1402
Webbed Arched Door (available in painted metallic black, 24 Karat gold plated and satin chrome plated finishes)	-	-	-	0*	-	0	0	0	0	0	0	0
Arched Door (available in painted metallic black, 24 Karat gold plated and satin chrome plated finishes)	-	-	-	0*	-	0	0	0	0	0	0	0
Upper Louvres (available in painted metallic black, 24 Karat gold plated and satin chrome plated finishes)	-	-	-	-	-	0*	0*	0*	-	-	-	-
Trivets (available in painted metallic black, 24 Karat gold plated and satin chrome plated finishes)	-	-	-	-	-	0*	0*	0*	-	-	-	-
Traditional Steel Legs (available in painted metallic black finish)	-	-	-	-	-	-	-	-	0	0	-	-
Ornamental Cast Iron Legs (available in 24 Karat plated and satin chrome plated finishes)	-	-	-	-	-	-	-	-	0	0	-	-
Spring Door Handles (available in painted metallic black, brass and satin chrome plated finishes)	-	-	-	0**	-	0	0	0	0	0	0	0
Cast Iron Surrounds (available in painted black and porcelain enamel Majolica brown finishes)	-	-	-	-	-	-	-	-	-	-	0	0
Flashing with Black Trim	-	-	-	-	-	-	-	-	-	-	0	0
COOKMATE™	-	-	-	-	-	0	0	0	-	-	-	-
Ash Drawer/Pan Kit	S	S	S	S	S	S	S	S	0	0	-	-
Brass Rail	-	-	-	-	-	-	-	-	0	0	-	-
Lift Top Lid	-	S	-	-	-	-	-	-	-	-	-	-
Screen Kit	0	-	-	-	-	-	-	-	-	-	-	-
Napoleon® Insignia	S	-	-	-	-	-	-	-	-	-	-	-
Variable Speed Blower	-	0	0	-	0	0	0	0	0	0	-	-
WHISPER QUIET™ Heat Circulating Blower	-	-	-	-	-	-	-	-	-	-	0	0
Blower Kit with Variable Speed and Thermostatic Control	0	-	-	0	-	-	-	-	-	-	-	-
Blower Guard	-	0	0	-	-	-	-	-	0	0	-	-
Thermostatic Sensor Control	-	0	0	-	0	0	0	0	0	0	-	-
Outside Air Kit	0	0	0	0	0	0	0	0	0	0	-	-

\*Painted metallic black finish comes standard \*\*Painted metallic black and satin chrome plated finishes only \*\*\*Satin chrome plated finish only

## 1600C

Shown on pages 4 & 5

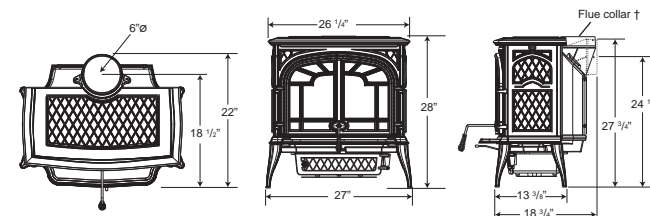


Model	BTU Heat Output*	BTU Heat Output (High Burn)**	Firebox Capacity (cu. ft.)	Area Heated (sq. ft.)***	Burn Time (Hours)	Log Size (Max)	Emissions (Grams Per Hour)	Flue Diameter		Catalytic Combuster	Mobile Home Approved	Blower Kit Available	Installation Clearances Top Flue Outlet	Corner	Rear	Sides	Weight of Bricks	Weight Without Doors
								Top	Rear									
1600C	9,250 - 33,400	52,000	1.46	500 - 1,500+	7 hrs	20"	6.75	6"	6"	No	Yes	Yes	Single wall chimney connector from stove to combustibles	15" (15")	24" (16")	16" (16")	N/A	330 lbs
													With approved double wall pipe from stove to combustibles	11" (11")	18" (12")	16" (16")		

If the stove is to be installed on a combustible floor, it must be placed on an approved non-combustible hearth pad, that extends 8" (200mm) beyond the stove sides and back, and 18" (455mm) to the front. Clearances can be reduced with shielding acceptable to local authorities. Reduced installation must comply with NFPA211 or CAN/CSA-B365.

## 1400C

Shown on pages 6 & 7

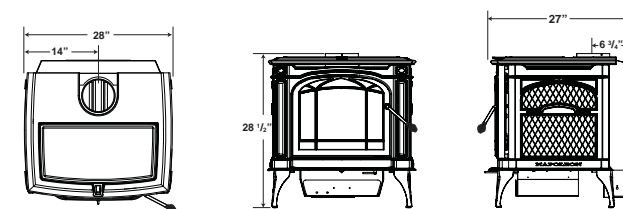


Model	BTU Heat Output*	BTU Heat Output (High Burn)**	Firebox Capacity (cu. ft.)	Area Heated (sq. ft.)***	Burn Time (Hours)	Log Size (Max)	Emissions (Grams Per Hour)	Flue Diameter		Catalytic Combuster	Mobile Home Approved	Blower Kit Available	Installation Clearances	Corner	Rear	Sides	Weight of Bricks	Weight Without Bricks, Doors or Top
								Top	Rear									
1400C	11,400 - 41,300	70,000	2.25	800 - 2,000+	9 hrs	18"	3.5	6"	N/A	No	Yes (US Only)	Yes	Single wall chimney connector from stove to combustibles	6"	12"	12"	145 lbs	305 lbs
													With approved double wall pipe from stove to combustibles	4"	6"	10"		

If the stove is to be installed on a combustible floor, it must be placed on an approved non-combustible hearth pad, that extends 8" (200mm) beyond the stove sides and back, and 18" (455mm) to the front. Clearances can be reduced with shielding acceptable to local authorities. Reduced installation must comply with NFPA211 or CAN/CSA-B365.

## 1100C

Shown on pages 6 & 7

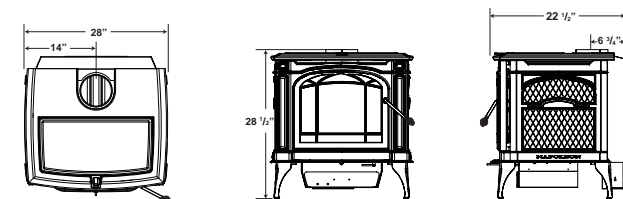

Model	BTU Heat Output*	BTU Heat Output (High Burn)**	Firebox Capacity (cu. ft.)	Area Heated (sq. ft.)***	Burn Time (Hours)	Log Size (Max)	Emissions (Grams Per Hour)	Flue Diameter		Catalytic Combuster	Mobile Home Approved	Blower Kit Available	Installation Clearances	Corner	Rear	Sides	Weight of Bricks	Weight Without Bricks, Doors or Top
								Top	Rear									
1100C	11,700 - 42,200	55,000	1.7	600 - 1,600+	7 hrs	18"	4.1	6"	N/A	No	Yes	Yes	Single wall chimney connector from stove to combustibles	6"	10"	12"	110 lbs	215 lbs
													With approved double wall pipe from stove to combustibles	2"	6"	10"		

If the stove is to be installed on a combustible floor, it must be placed on an approved non-combustible hearth pad, that extends 8" (200mm) beyond the stove sides and back, and 18" (455mm) to the front. Clearances can be reduced with shielding acceptable to local authorities. Reduced installation must comply with NFPA211 or CAN/CSA-B365.


\* EPA (Environmental Protection Agency) rated BTU/h with softwood test fuel (for emissions only) - no refueling  
 \*\* Wolf Steel Ltd. own test results showing realistic BTU's using hardwood logs with regular refueling. Heat output will differ on chimney draft as well as type, moisture content and size of wood.  
 \*\*\* Figures may vary with individual conditions such as floor plan layout, insulation value/heat loss of the house, geographical location and firewood used.  
 † Flue collar is able to be installed as either top exit or side exit.

( ) With Rear Shield



## 1150P - Wood Gourmet™ Cookstove

Shown on pages 8 & 9

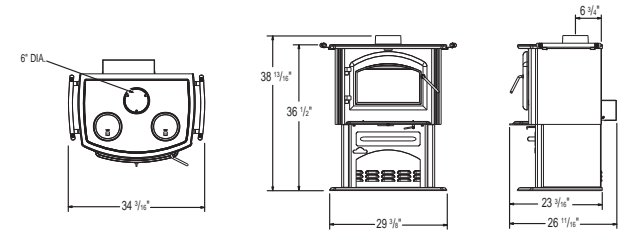


Model	BTU Heat Output*	BTU Heat Output (High Burn)**	Firebox Capacity (cu. ft.)	Area Heated (sq. ft.)***	Burn Time (Hours)	Log Size (Max)	Emissions (Grams Per Hour)	Flue Diameter		Catalytic Combuster	Mobile Home Approved	Blower Kit Available	Installation Clearances	Corner	Rear	Sides	Weight of Bricks	Weight Without Bricks or Doors
								Top	Rear									
1150P	11,700-42,200	55,000	1.7	600-1,600+	7 hrs	18"	4.1	6"	N/A	No	No	Yes	Single wall chimney connector from stove to combustibles	6"	10"	12"	110 lbs	280 lbs
													With approved double wall pipe from stove to combustibles	N/A	N/A	N/A		

If the stove is to be installed on a combustible floor, it must be placed on an approved non-combustible hearth pad, that extends 8" (200mm) beyond the stove sides and back, and 18" (455mm) to the front. Clearances can be reduced with shielding acceptable to local authorities. Reduced installation must comply with NFPA211 or CAN/CSA-B365. Clearances are unable to be reduced for the 1150 by using double wall pipe.

## 1450 - Independence™

Shown on pages 10 & 11

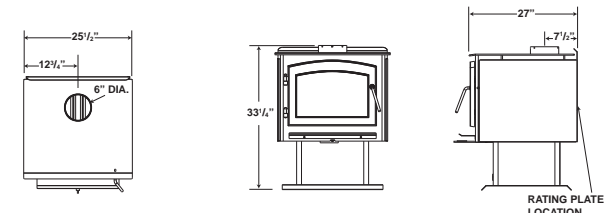


Model	BTU Heat Output*	BTU Heat Output (High Burn)**	Firebox Capacity (cu. ft.)	Area Heated (sq. ft.)***	Burn Time (Hours)	Log Size (Max)	Emissions (Grams Per Hour)	Flue Diameter		Catalytic Combuster	Mobile Home Approved	Blower Kit Available	Installation Clearances	Corner	Rear	Sides	Weight of Bricks	Weight Without Bricks, Doors or Faceplates
								Top	Rear									
1450	11,400-41,300	70,000	2.25	800-2,000+	9 hrs	18"	3.5	6"	N/A	No	Yes (US Only)	Yes	Single wall chimney connector from stove to combustibles	6"	12"	12"	145 lbs	250 lbs
													With approved double wall pipe from stove to combustibles	4"	6"	10"		

If the stove is to be installed on a combustible floor, it must be placed on an approved non-combustible hearth pad, that extends 8" (200mm) beyond the stove sides and back, and 18" (455mm) to the front. Clearances can be reduced with shielding acceptable to local authorities. Reduced installation must comply with NFPA211 or CAN/CSA-B365.

## 1100

Shown on pages 12 & 13

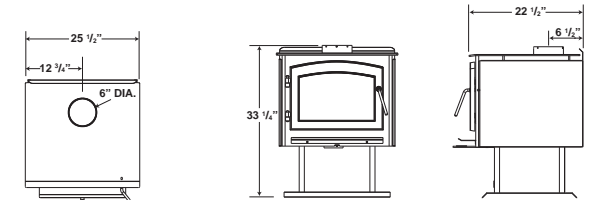


Model	BTU Heat Output*	BTU Heat Output (High Burn)**	Firebox Capacity (cu. ft.)	Area Heated (sq. ft.)***	Burn Time (Hours)	Log Size (Max)	Emissions (Grams Per Hour)	Flue Diameter		Catalytic Combuster	Mobile Home Approved	Blower Kit Available	Installation Clearances	Corner	Rear	Sides	Weight of Bricks	Weight Without Bricks, Doors or Faceplates
								Top	Rear									
1100	11,700-42,200	55,000	1.7	600-1,600+	7hrs	18"	4.1	6"	N/A	No	Yes	Yes	Single wall chimney connector from stove to combustibles	6"	10"	12"	110 lbs	215 lbs
													With approved double wall pipe from stove to combustibles	2"	6"	10"		

If the stove is to be installed on a combustible floor, it must be placed on an approved non-combustible hearth pad, that extends 8" (200mm) beyond the stove sides and back, and 18" (455mm) to the front. Clearances can be reduced with shielding acceptable to local authorities. Reduced installation must comply with NFPA211 or CAN/CSA-B365.

EPA (Environmental Protection Agency) rated BTU/h with softwood test fuel (for emissions only) - no refueling. \*  
 Wolf Steel Ltd. own test results showing realistic BTU's using hardwood logs with regular refueling. Heat output will differ on chimney draft as well as type, moisture content and size of wood. \*\*  
 Figures may vary with individual conditions such as floor plan layout, insulation value/heat loss of the house, geographical location and firewood used. \*\*\*

## 1400

Shown on pages 12 & 13

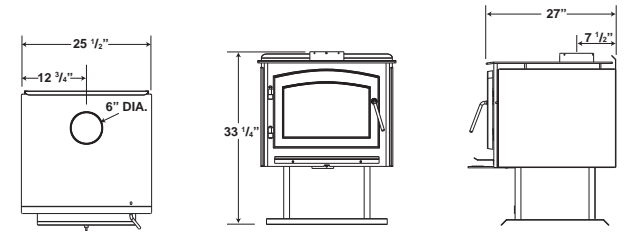


Model	BTU Heat Output*	BTU Heat Output (High Burn)**	Firebox Capacity (cu. ft.)	Area Heated (sq. ft.)***	Burn Time (Hours)	Log Size (Max)	Emissions (Grams Per Hour)	Flue Diameter		Catalytic Combuster	Mobile Home Approved	Blower Kit Available	Installation Clearances	Corner	Rear	Sides	Weight of Bricks	Weight Without Bricks, Doors or Faceplates
								Top	Rear									
1400	11,400 - 41,300	70,000	2.25	800 - 2,000+	9 hrs	18"	3.5	6"	N/A	No	Yes (US Only)	Yes	Single wall chimney connector from stove to combustibles	6"	12"	12"	145 lbs	250 lbs
													With approved double wall pipe from stove to combustibles	4"	6"	10"		

If the stove is to be installed on a combustible floor, it must be placed on an approved non-combustible hearth pad, that extends 8" (200mm) beyond the stove sides and back, and 18" (455mm) to the front. Clearances can be reduced with shielding acceptable to local authorities. Reduced installation must comply with NFPA211 or CAN/CSA-B365.

## 1900

Shown on pages 12 & 13

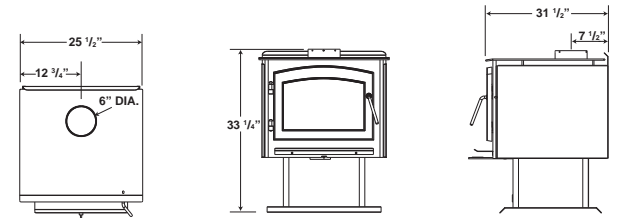


Model	BTU Heat Output*	BTU Heat Output (High Burn)**	Firebox Capacity (cu. ft.)	Area Heated (sq. ft.)***	Burn Time (Hours)	Log Size (Max)	Emissions (Grams Per Hour)	Flue Diameter		Catalytic Combuster	Mobile Home Approved	Blower Kit Available	Installation Clearances	Corner	Rear	Sides	Weight of Bricks	Weight Without Bricks, Doors or Faceplates
								Top	Rear									
1900	11,800 - 34,000	85,000	3.0	1,000 - 3,500+	12 hrs	21"	2.8	6"	N/A	No	No	Yes	Single wall chimney connector from stove to combustibles	8"	12"	22"	114 lbs	285 lbs
													With approved double wall pipe from stove to combustibles	8"	12"	22"		

If the stove is to be installed on a combustible floor, it must be placed on an approved non-combustible hearth pad, that extends 8" (200mm) beyond the stove sides and back, and 18" (455mm) to the front. Clearances can be reduced with shielding acceptable to local authorities. Reduced installation must comply with NFPA211 or CAN/CSA-B365.

## 1100PL

Shown on pages 14 & 15

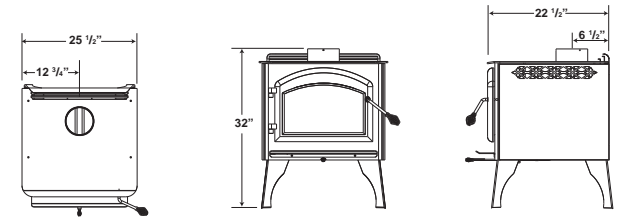


Model	BTU Heat Output*	BTU Heat Output (High Burn)**	Firebox Capacity (cu. ft.)	Area Heated (sq. ft.)***	Burn Time (Hours)	Log Size (Max)	Emissions (Grams Per Hour)	Flue Diameter		Catalytic Combuster	Mobile Home Approved	Blower Kit Available	Installation Clearances	Corner	Rear	Sides	Weight of Bricks	Weight Without Bricks, Doors or Faceplates
								Top	Rear									
1100PL	11,700 - 42,200	55,000	1.7	600 - 1,600+	7 hrs	18"	4.1	6"	N/A	No	Yes	Yes	Single wall chimney connector from stove to combustibles	6"	10"	12"	110 lbs	215 lbs
													With approved double wall pipe from stove to combustibles	2"	6"	10"		

If the stove is to be installed on a combustible floor, it must be placed on an approved non-combustible hearth pad, that extends 8" (200mm) beyond the stove sides and back, and 18" (455mm) to the front. Clearances can be reduced with shielding acceptable to local authorities. Reduced installation must comply with NFPA211 or CAN/CSA-B365.

\* EPA (Environmental Protection Agency) rated BTU/h with softwood test fuel (for emissions only) - no refueling  
 \*\* Wolf Steel Ltd. own test results showing realistic BTU's using hardwood logs with regular refueling. Heat output will differ on chimney draft as well as type, moisture content and size of wood.  
 \*\*\* Figures may vary with individual conditions such as floor plan layout, insulation value/heat loss of the house, geographical location and firewood used.

## 1400PL

Shown on pages 14 & 15

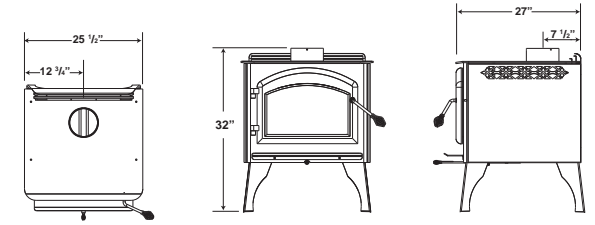


Model	BTU Heat Output*	BTU Heat Output (High Burn)**	Firebox Capacity (cu. ft.)	Area Heated (sq. ft.)***	Burn Time (Hours)	Log Size (Max)	Emissions (Grams Per Hour)	Flue Diameter		Catalytic Combuster	Mobile Home Approved	Blower Kit Available	Installation Clearances	Corner	Rear	Sides	Weight of Bricks	Weight Without Bricks, Doors or Faceplates
								Top	Rear									
1400PL	11,400-41,300	70,000	2.25	800-2,000+	9 hrs	18"	3.5	6"	N/A	No	No	Yes	Single wall chimney connector from stove to combustibles	6"	12"	12"	145 lbs	250 lbs
													With approved double wall pipe from stove to combustibles	4"	6"	10"		

If the stove is to be installed on a combustible floor, it must be placed on an approved non-combustible hearth pad, that extends 8" (200mm) beyond the stove sides and back, and 18" (455mm) to the front. Clearances can be reduced with shielding acceptable to local authorities. Reduced installation must comply with NFPA211 or CAN/CSA-B365.

## 1101

Shown on pages 16 & 17

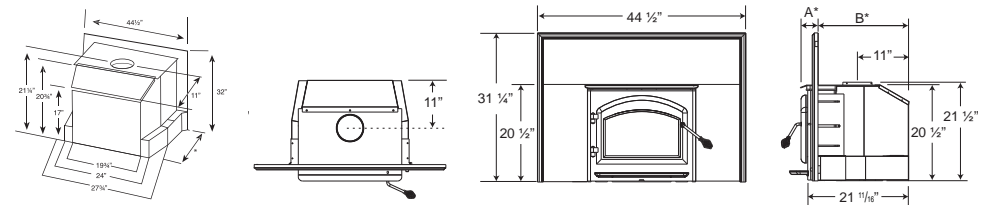


\*To allow for shallow fireplace openings - Insert adjusts up to 5", from 16 1/2" to 21" in depth.

Model	BTU Heat Output*	BTU Heat Output (High Burn)**	Firebox Capacity (cu. ft.)	Area Heated (sq. ft.)***	Burn Time (Hours)	Log Size (Max)	Emissions (Grams Per Hour)	Flue Diameter		Catalytic Combuster	Mobile Home Approved	Blower Kit Available	Installation	Width	Height	Depth	Weight of Bricks	Weight Without Bricks, Doors or Faceplates
								Top	Rear									
1101	11,700-42,200	55,000	1.7	600-1,600+	7 hrs	18"	4.1	6"	N/A	No	No	Standard	Minimum Fireplace Opening	28 1/2"	22"	16 1/2"	110 lbs	185 lbs
													Finished Outside Dimensions if using Cast Iron Surround	42 1/4"	28 1/8"	-		

If the stove is to be installed on a combustible floor, it must be placed on an approved non-combustible hearth pad, that extends 8" (200mm) beyond the stove sides and back, and 18" (455mm) to the front. Clearances can be reduced with shielding acceptable to local authorities. Reduced installation must comply with NFPA211 or CAN/CSA-B365.

## 1402

Shown on pages 18 & 19

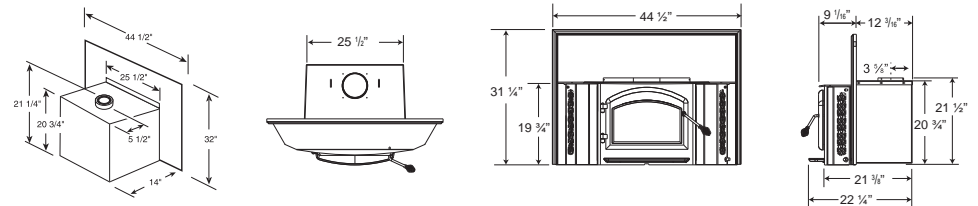

Model	BTU Heat Output*	BTU Heat Output (High Burn)**	Firebox Capacity (cu. ft.)	Area Heated (sq. ft.)***	Burn Time (Hours)	Log Size (Max)	Emissions (Grams Per Hour)	Flue Diameter		Catalytic Combuster	Mobile Home Approved	Blower Kit Available	Installation	Width	Height	Depth	Weight of Bricks	Weight Without Bricks, Doors or Faceplates
								Top	Rear									
1402	11,400-41,300	70,000	2.25	800-2,000+	9 hrs	18"	3.5	6"	N/A	No	No	Standard	Minimum Fireplace Opening	26"	22"	14"	145 lbs	250 lbs
													Finished Outside Dimensions if using Cast Iron Surround	53 1/2"	32"	-		

If the stove is to be installed on a combustible floor, it must be placed on an approved non-combustible hearth pad, that extends 8" (200mm) beyond the stove sides and back, and 18" (455mm) to the front. Clearances can be reduced with shielding acceptable to local authorities. Reduced installation must comply with NFPA211 or CAN/CSA-B365.

EPA (Environmental Protection Agency) rated BTU/h with softwood test fuel (for emissions only) - no refueling. \*  
 Wolf Steel Ltd. own test results showing realistic BTU's using hardwood logs with regular refueling. Heat output will differ on chimney draft as well as type, moisture content and size of wood. \*\*  
 Figures may vary with individual conditions such as floor plan layout, insulation value/heat loss of the house, geographical location and firewood used. \*\*\*

Other Napoleon Products



Fireplace Inserts • Charcoal Grills • Gas Fireplaces • Waterfalls • Pellet Insert  
Hybrid Furnaces • Electric Fireplaces • Heating & Cooling • Gourmet Grills



24 Napoleon Road, Barrie, Ontario, Canada L4M 0G8  
103 Miller Drive, Crittenden, Kentucky, USA 41030  
7200 Trans Canada Highway, Montreal, Quebec, Canada H4T 1A3

Tel: 705-721-1212 Fax: 705-722-6031  
napoleonfireplaces.com



Authorized Dealer

Napoleon® stoves are certified for emissions to EPA phase 2 1990 and DEQ 1988 Standards and safety tested by Warnock Hersey to North American Standards, CSA B366.2, ULC S627, ULC S628 and UL 1482. In addition to meeting current EPA requirements, all Napoleon® wood burning stoves and Inserts with emissions at or below 4.5 grams per hour meet the proposed new EPA clean burning levels targeted for implementation in 2013. Consult your owner's manual for complete installation instructions and check all local and national building codes. All specifications and designs are subject to change without notice to allow for on-going product improvement. Images may not be exactly as shown. Actual enamel colours might be slightly different as shown in brochure. © Wolf Steel Ltd. Napoleon® is a registered trademark of Wolf Steel Ltd.