



The DRC2000 Series offers excellent value without compromising on quality or design. These fireplaces offer an array of standard features, increased performance and state of the art technology to ensure many years of beauty and warmth.

FEATURES

- Available in 33", 35", 40" and 45" clean-faced models
- Dedicated top or rear flue configuration (45" model is a combo top/rear)
- Millivolt or electronic ignition with seamless battery backup to provide continued operation in the event of a power outage (IPI/CPI switch standard)
- Beautiful flame that rises through reflective black crushed glass media
- Outstanding heating efficiency for increased comfort and lower operating costs
- Standard tempered glass and a protective screen*
- Black painted interior
- Durable textured powder coat finish
- Optional blower and remote controls available for all models
- 20 year limited warranty

*All applicable models comply with ANSI Z21.50/88 barrier requirements.


INTERIOR

(Standard)



Black Painted Interior

APPLIANCE SPECIFICATIONS

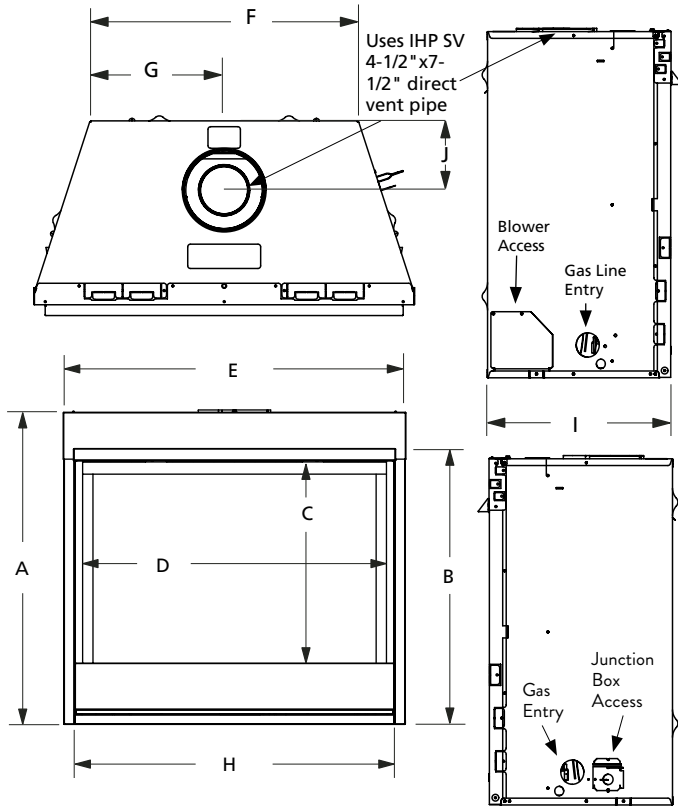

| | DRC2033 | DRC2035 | DRC2040 | DRC2045 |
|---|-----------|---------|---------|---------|
| A | 30-1/8" | 32-1/8" | 37-1/8" | 37-1/8" |
| B | 26-1/4" | 28-3/4" | 33-1/4" | 33-1/4" |
| C | 18-5/16" | 22-1/4" | 27-1/4" | 27-1/4" |
| D | 30-1/2" | 32-3/8" | 37-3/8" | 42-3/8" |
| E | 33-5/8" | 35-1/4" | 40-1/4" | 45-1/4" |
| F | 21-7/8" | 25" | 30" | 35" |
| G | 10-15/16" | 12-1/2" | 15" | 17-1/2" |
| H | 31" | 32-7/8" | 37-7/8" | 42-7/8" |
| I | 14" | 17" | 17" | 17" |
| J | 5-3/4" | 6-7/8" | 6-7/8" | 6-7/8" |

FRAMING SPECIFICATIONS


| | DRC2033 | DRC2035 | DRC2040 | DRC2045 |
|--------|---------|---------|---------|---------|
| WIDTH | 33-3/4" | 35-3/8" | 40-3/8" | 45-3/8" |
| HEIGHT | 34-1/4" | 36-1/4" | 41-1/4" | 41-1/4" |
| DEPTH | 14-1/2" | 18-1/2" | 18-1/2" | 18-1/2" |

* Includes 4" for fold-up standoffs


On the Cover: DRC2035 shown with reflective black glass media and black painted interior

OPTIONAL ACCESSORIES


Glass Media



Platinum



Reflective Blue



Copper

ADDITIONAL ACCESSORIES

Choice of blower with multiple control options

Remotes & wall mounted controls

FIREPLACE EFFICIENCIES

| MODEL | FUEL | BTU/HR | AFUE** | P4/ENERGUIDE* |
|---------|------|--------|--------|---------------|
| DRC2033 | NG | 12,000 | 64% | 60.4%/64.8% |
| DRC2033 | LP | 10,000 | 64% | 60.4%/64.8% |
| DRC2035 | NG | 15,000 | 65.5% | 61.0%/65.0% |
| DRC2035 | LP | 12,000 | 65.5% | 61.0%/65.0% |
| DRC2040 | NG | 16,000 | 65.5% | 62.0%/65.0% |
| DRC2040 | LP | 15,000 | 65.5% | 62.0%/65.0% |
| DRC2045 | NG | 20,000 | 65% | 63.0%/66.0% |
| DRC2045 | LP | 19,000 | 65% | 63.0%/66.0% |

*Intermittent ignition systems. Millivolt/Electronic.

**Annual Fuel Utilization Efficiency (AFUE) is the recognized U.S. rating system for the total efficiency of heating products.

IMPORTANT NOTES:

As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation, wind, vent configuration and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, climate, condition and type of fuel used, appliance location, burn rate, accessories chosen, chimney installation and how the appliance is operated.

Diagrams, illustrations and photographs are not to scale—consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.



© 2020 Innovative Hearth Products

785495M 12/20

Visit us online
SuperiorFireplaces.us.com

