

Wireless Microphone Set SWM-2

When a sound transmission needs to be recorded, use our convenient play and play wireless microphone set with a recording device.



Transmitter Specifications:

Transmitting frequency of F1: 171.105MHz – F2: 171.905MHz

FM band

+/-2KHz maximum deviation

DC 3V power

Uses 2 AA batteries (not included)

Power switch

Channel selector switch

LED power indicator

Receiver Specifications:

Receiving frequency of F1: 171.105MHz – F2: 171.905MHz

Sensitivity of 10dB uV for 20dB S/N

Dc 3V power

Uses 2 AA batteries (not included)

Power switch

Channel selector switch


LED power on

Transmitter size: 3 ¼ x 2 ½ x 1

Receiver size: 4 x 2 ½ x 1

Note: The red indicator light will only flash once when the power switch is turned to ON position.

Wireless Microphone Set SWM-2

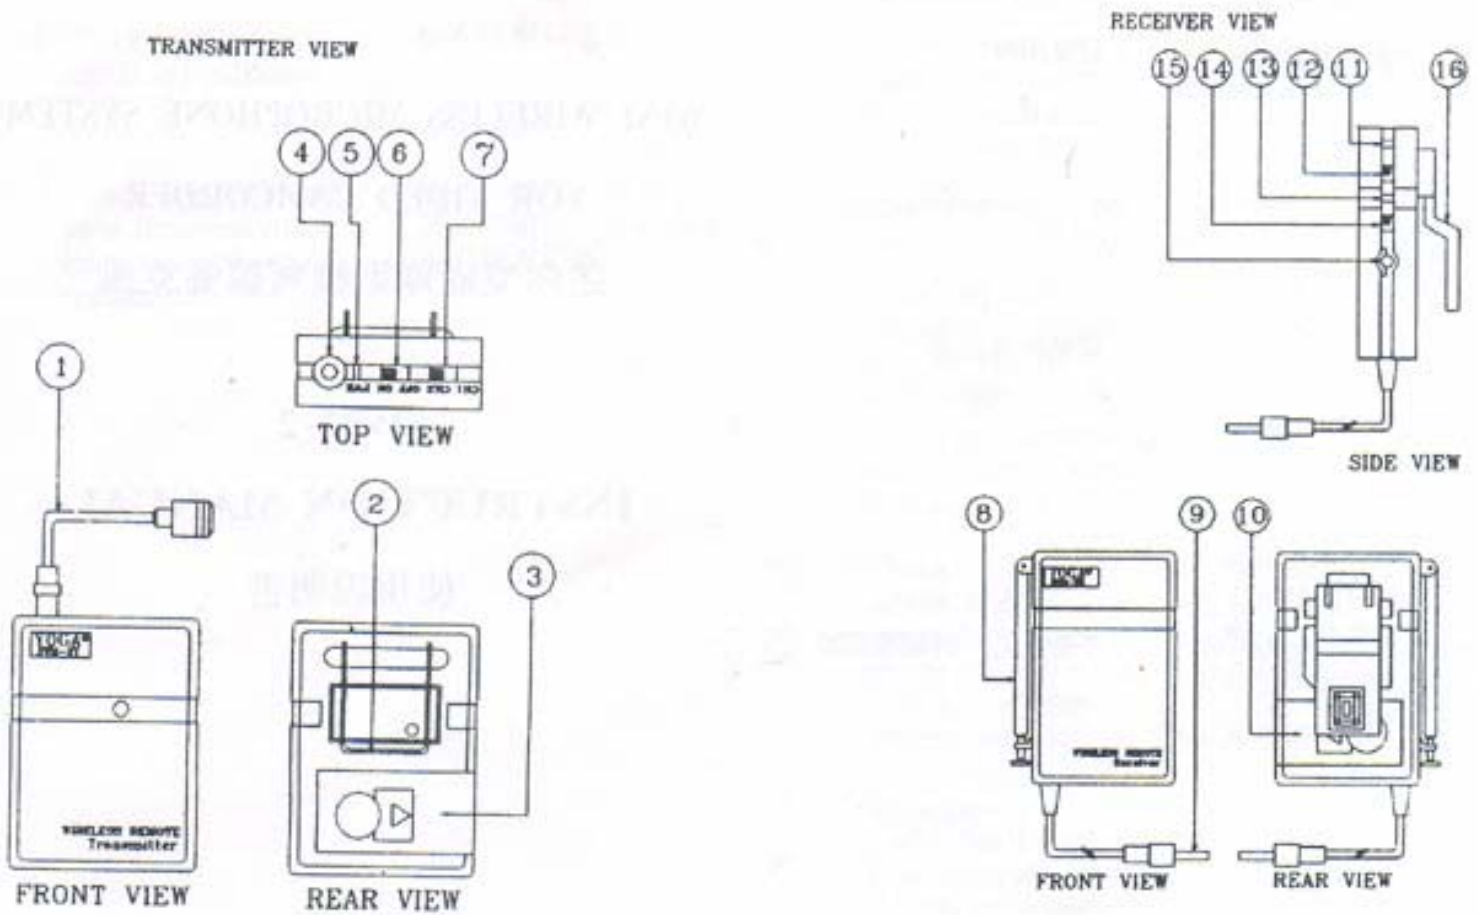

- 1-Lapel Microphone
- 2-Belt clip
- 3-Battery Compartment cover
- 4-External Mic jack
- 5-Power on indicator
- 6-Power on/off switch
- 7-Channel selector switch

- 8-Rod telescopic antenna
- 9-Audio signal output cord
- 10-Battery compartment cover
- 11-Receiving signal indicator
- 12-Channel select switch
- 13-Power indicator
- 14-Earphphone jack
- 15-Mounting bracket