

REMOTE CONTROLLED DOG TRAINING COLLARS



Dogtra Company

22912 Lockness Avenue
Torrance, CA 90501
U.S.A.

telephone (310) 534 - 0101
fax (310) 534 - 9111
toll free 1-888-811-9111



***dogtra* 3500NCP Super-X Series** **CODE SETTING GUIDE**




CONTENTS

- Code setting for your newly replaced 1
3500NCP Super-X Transmitter (One-Dog)
- Code setting for your newly replaced 2
3500NCP Super-X Receiver (One-Dog)
- Code setting for your newly replaced 2
3502NCP Super-X Transmitter (Two-Dog)
- Code setting for your newly replaced 5
3502NCP Super-X Black Collar/Receiver for
(Two-Dog)
- Code setting for your newly replaced 5
3502NCP Super-X Orange Collar/Receiver for
(Two-Dog)


Code setting for your newly replaced 3500NCP Super-X Transmitter (One-Dog)

Once you have received the transmitter that was sent to you by the Dogtra facility, you need to code set your unit to control your Receiver with the new Transmitter.


The code setting method is as follows:

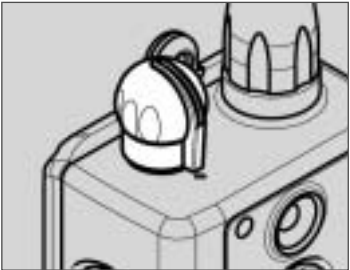

1) Turn the Transmitter on by pushing the ON/OFF Switch located on the right side then select the level "0" with the Intensity Selection Dial.

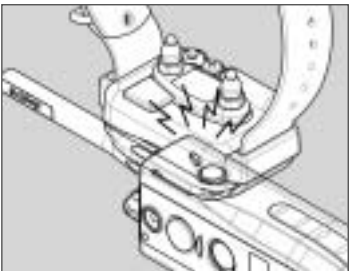

2) Place the red dot on the back of the transmitter to the red dot on the collar/receiver. Hold the two red dots together for about 5 seconds or more. Release them when the green LED blinks fast on the collar/receiver.

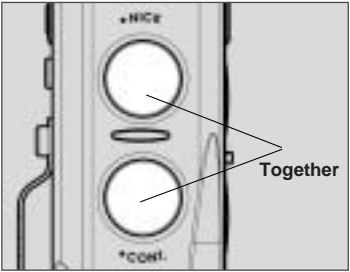

3) Within 5 seconds after releasing the transmitter and the receiver, hold the Nick button and the Constant button together located on the left side of the transmitter for 3 seconds, or until the rapid green blink resumes to a slower paced green blink. The LED

indicator light blinks once every 4 seconds after staying on green for about a second. Now the setting work is completed.

Code setting for your newly replaced 3500NCP Super-X Receiver (One-Dog)

Once you have received the collar/receiver that was sent to you by the Dogtra facility, you need to code set your unit to control the new Receiver with your Transmitter.


The code setting method is the same as the procedure described on “Code setting for your newly replaced 3500NCP Super-X Transmitter(One-Dog)”.

Code setting for your newly replaced 3502NCP Super-X Transmitter (Two-Dog)


Once you have received the transmitter that was sent to you by the Dogtra facility, you need to code set your unit to control your Black Collar/Receiver and Orange Collar/Receiver with the new Transmitter.

The method of the code setting is as follows:


Code setting for your Black Collar/Receiver:

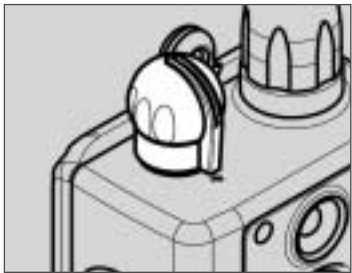


- 1) Turn the Transmitter on by pushing the ON/OFF Switch located on the right side then select the level “0” with the Intensity Selection Dial.

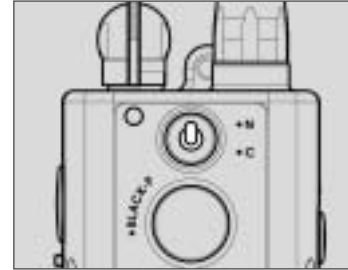

- 2) Set the Nick/Constant Toggle Switch on the front of the transmitter on the “N” position.

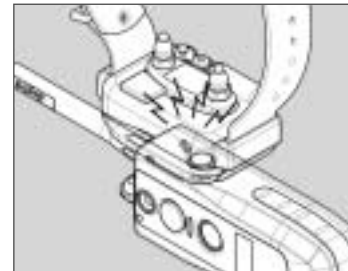


- 3) Place the red dot on the back of the transmitter to the red dot on the Black collar/receiver. Hold the two red dots together for about 5 seconds or more. Release them when the green LED blinks fast on the collar/receiver.

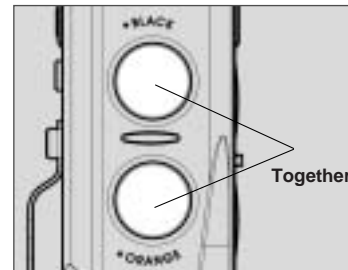


- 4) Within 5 seconds after releasing the transmitter and the receiver, hold the Black button and the Orange button on the left side of the transmitter together for 3 seconds, or until the rapid green blink resumes to a slower paced green blink. The LED indicator

light blinks once every 4 seconds after staying on green for about a second. Now the setting work is completed.


Code setting for your Orange Collar/Receiver:

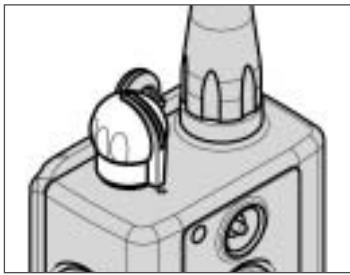


- 1) Turn the Transmitter on by pushing the ON/OFF Switch located on the right side then select the level "0" with the Intensity Selection Dial.

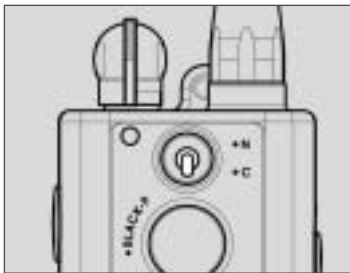

- 2) Set the Nick/Constant Toggle Switch on the front of the transmitter on the "C" position.

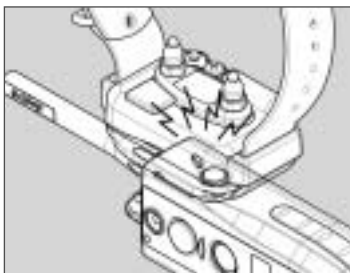

- 3) Place the red dot on the back of the transmitter to the red dot on the Orange collar/receiver. Hold the two red dots together for about 5 seconds or more. Release them when the green LED blinks fast on the collar/receiver.

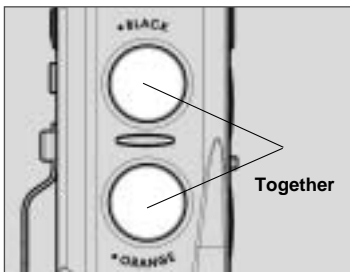

- 4) Within 5 seconds after releasing the transmitter and the receiver, hold the Black button and the Orange button on the left side of the transmitter together for 3 seconds, or until the rapid green blink resumes to a slower paced green blink. The LED indicator

light blinks once every 4 seconds after staying on green for about a second. Now the setting work is completed.

Code setting for your newly replaced 3502NCP Super-X Black Collar/Receiver for (Two-Dog)

Once you have received the black collar/receiver that was sent to you by the Dogtra facility, you need to code set your unit to control the new Black Collar/Receiver with your Transmitter.

The code setting method is the same as the procedure introduced on the page 2 "Code setting for your Black Collar/Receiver."

Code setting for your newly replaced 3502NCP Super-X Orange Collar/Receiver for (Two-Dog)

Once you have received the orange collar/receiver that was sent to you by the Dogtra facility, you need to code set your unit to control the new Orange Collar/Receiver with your Transmitter.

The code setting method is the same as the procedure introduced on the page 4 "Code setting for your Orange Collar/Receiver."