


ETS

Electronic Technical Services Inc.
211 Conchas SE
Albuquerque, NM 87123
PH 505-888-3923 FAX 505-888-3926
Website: www.etsnm.com

SM17 Audio Surveillance Kit

Description

Complete 16 zone, manual switching, audio surveillance system. Can be used independently for monitoring live audio or with tape recorders for recording and playback. Two modes of operation: Switcher (select one of eight zones) or mixer (select any combination of zones).

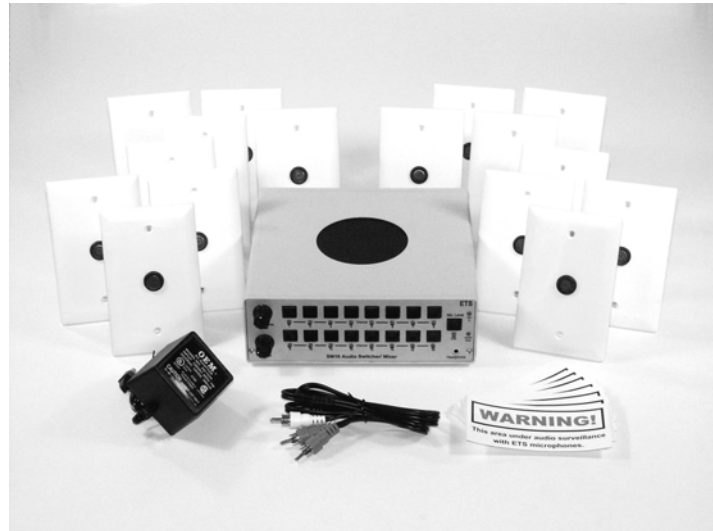

Kit Includes

- 16 SM1 Pre-amplified microphones.
- SM16 Switcher / mixer / amplifier.
- 12 VDC AC adapter.
- 3' Dual RCA Patch cable.
- Warning label.

Options

- SM1S surface mount adapter for SM1.
- White (standard) or ivory face plate.

Wiring Requirements

- Stranded 22-gauge, 2-conductor shielded cable. Distances up to 1000'.

Caution

It may be against the law to install this equipment in certain environments. It is the responsibility of the installation company and end user to comply with state and federal laws. If you are unfamiliar with these laws, consult a qualified attorney.

Warranty

1 year parts and labor.

SM1 Microphone Specifications

- Omni-directional element w/25' range.
- Low noise MOSFET pre-amplifier.
- Line level, unbalanced output.
- Adjustable gain.
- Treble boost circuit. Selectable on/off. Enhances clarity of time lapse recordings.
- Limiter circuit. Selectable on/off.
- Easy cable run termination.
- Flush or surface mountable.
- Power: 12 VDC @ 10mA.

SM16 Switcher / Mixer Specifications

- In/out switches and level controls for each microphone channel.
- All settings stored in non-volatile memory.
- Standard RCA jacks for connection to tape recorders, etc.
- Easy cable run termination.
- 1 Watt Power amplifier.
- 3" full range speaker.
- Tape monitor switch.
- 3.5mm Headphone jack.
- Power: 12 VDC @ 420mA
- Reverse polarity protected and fused.
- Dimensions W 7.29 x L 7.00 x H 2.52