

AnchorMAN^{PATENT PENDING} Intercom

Full Duplex Wireless Intercom Specifications

Advancing Technology

AnchorMAN is a wireless duplex intercom system that is easy to configure and easy to operate. The system allows duplex communication by four users and an unlimited number of people can listen in. Belt packs can be assigned to up to four separate groups. The transmitter and receiver operate utilizing FDMA techniques in the 944 – 952 MHz range for the U.S. without the need for a base station. This patent pending wireless intercom has a range up to 250' in duplex mode and up to 2,500' in simplex mode.


The ergonomically designed BP-900 belt pack has an XLR headset jack, heavy duty antenna, headset volume control, microphone sensitivity control, group selection, PTT (push to talk) and transmission indicator light. A gang charger is available to charge up to four belt packs on one device. Anchor provides the ease and confidence of use by suggesting a four person package at excellent pricing. Get your AnchorMAN today.

ANCHORMAN FEATURES

2-YEAR WARRANTY!

- EASE OF USE – ADJUST BELT PACK SETTINGS & BEGIN USE
- OPTIONAL SINGLE OR DUAL HEADSETS
- FOUR USER SELECTABLE GROUPS
- PTT OR VOICE ACTIVATED TRANSMISSION
- GANG CHARGER FOR FOUR BELT PACKS
- RECHARGEABLE BATTERIES INCLUDED
- SAFE – ANCHORMAN IS NOT PENETRATED BY COMMON SCANNER DEVICES
- FCC LICENSE REQUIRED – WWW.FCC.GOV

MADE IN THE USA!

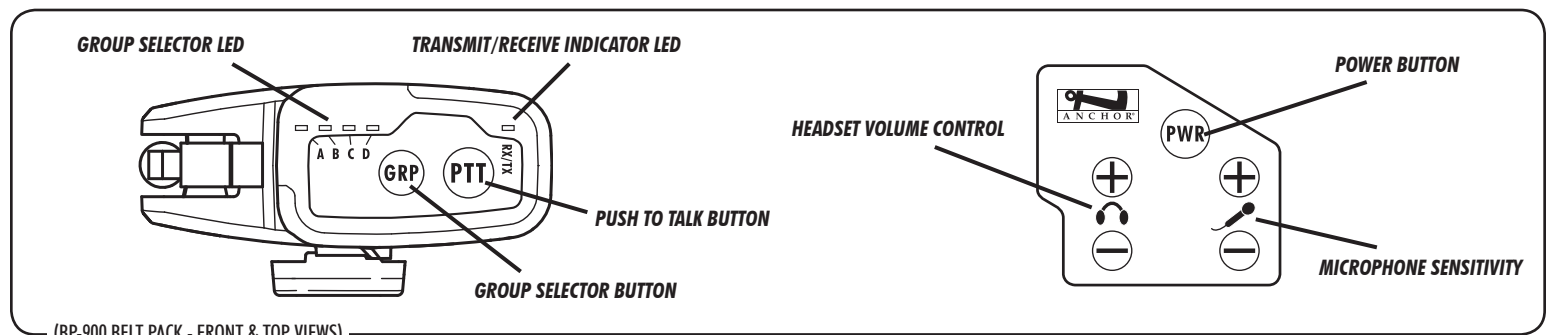

ANCHORMAN COMPONENTS

- BP-900** Wireless Belt Pack
- H-200** Dual Ear Muff Headset
- H-200S** Single Ear Muff Headset
- GC-900** Gang Charger
- HC-PC** Pelican Hardcase w/ Pick 'n Pluck Foam



ANCHORMAN SYSTEM

ANCHORMAN-40 Four User Package:

- 4 - BP-900 Belt Packs
- 4 - Headsets (choose single or dual)
- 1 - GC-900 Gang Charger
- Lightweight, high-density cardboard case

ANCHORMAN TECHNICAL SPECIFICATIONS

Range (line of sight)	
Duplex	250' / 74 m
Simplex	2,500' / 750 m
FCC License	User Registration
Selectable Groups	4
Frequency	944 – 952 MHz
Frequency Settings	4 per Group
Output Power	17 dBm (50mW)
Microphone	Dynamic
DC Requirements	9V – 1.2A
Headset Connector	4-pin male XLR
Antenna	1/2 wave length dipole

Batteries	4 "AA" NiMH rechargeable
Battery Charge Time	5.5 hours = Full Charge
Battery Life – NiMH Rechargeable	
Receive Only	7.5 hours
Continuous Transmit	3.5 hours
Battery Life – Alkaline Disposable	
Receive Only	3.0 hours
Continuous Transmit	1.0 hours

Dimensions & Weight	
BP-900	4 x 4.65 x 1.75" / 101.6 x 118.1 x 44.5 mm
	13 oz / .37 kg (batteries installed)
H-200S	3.5 x 7.4 x 7.9" / 8.9 x 18.8 x 20 cm
	13 oz / .37 kg
H-200	3.5 x 7.4 x 7.9" / 8.9 x 18.8 x 20 cm
	16 oz / .45 kg
Antenna	7.18" / 182.372 mm
Antenna Extension	3.5" / 89 mm

FCC ID: J8ZBP-900



(FEATURES & SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE)



Anchor Audio, Inc.

Portable Sound Systems • Torrance, California

888/444-6077

www.anchoraudio.com

S-AM/0707