



ELICA


COLLECTION

OPTICA WALL

The daringly asymmetrical architecture of Optica's tempered glass and steel structure is yet another example of the Elica Collection's assertively future-forward design aesthetic. It is balanced, harmonious, and yet fresh and unexpected. The kind of brilliance that will transform any kitchen into a showplace.



ELICA COLLECTION

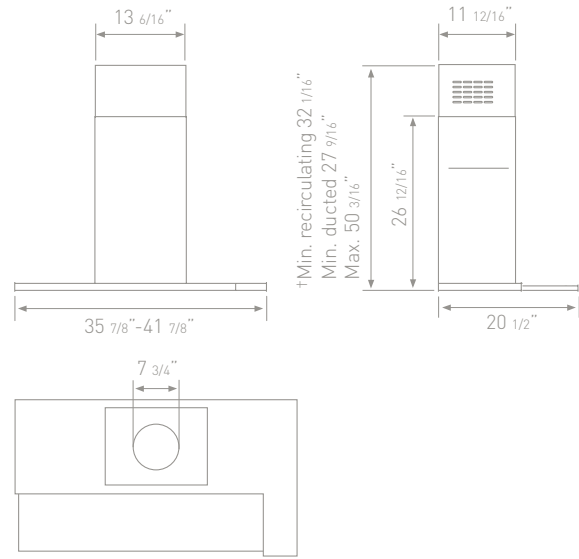

†Ductless (Recirculating); lower holes exposed.
Note: if necessary order the proper duct cover extension kit.

OPTICA

WALL

MODEL	EOP-E36ASX	EOP-E42ASX
SIZE	36"	42"
NET WIDTH	35 7/8"	41 7/8"
*PERFORMANCE		
Internal Blower CFM	600	600
**In-Line Blower CFM	1100	1100
Sones (Internal Blower)	9	9
COLOR/FINISH		
Stainless Steel w/Glass	S	S
FEATURES & ACCESSORIES		
Controls	Soft Touch	Soft Touch
Speed Levels	3	3
Boost Speed	No	No
Lighting	Halogen 20w 12v x 2	Halogen 20w 12v x 2
Dual Level Lighting	No	No
RF Remote	No	No
Passive Silencer	Yes	Yes
DUCT SPECIFICATIONS		
**Ducting	8"	8"
Recirculating	Yes	Yes
Duct Cover Extension Option (up to 12' ceiling)	Yes	Yes
Mounting Heights (Ducted) (Louver holes hidden)	Min. ceiling height 7'4". Hood mounted 24" above cooking surface; 60" from floor.	Max. ceiling height 9'10". Hood mounted 32" above cooking surface; 68" from floor.
Mounting Heights (Recirculating) (Louver holes exposed)	Min. ceiling height 7'8". Hood mounted 24" above cooking surface; 60" from floor.	Max. ceiling height 9'10". Hood mounted 32" above cooking surface; 68" from floor.

* Blowers not included with hoods, order blower option separately. ** Run 10" round duct work from in-line blower to the ceiling bracket. Before duct work passes through the ceiling bracket, use a 10" to 8" transition adaptor (included) and run 8" duct.

